


Luminaire

Styrk

Curve

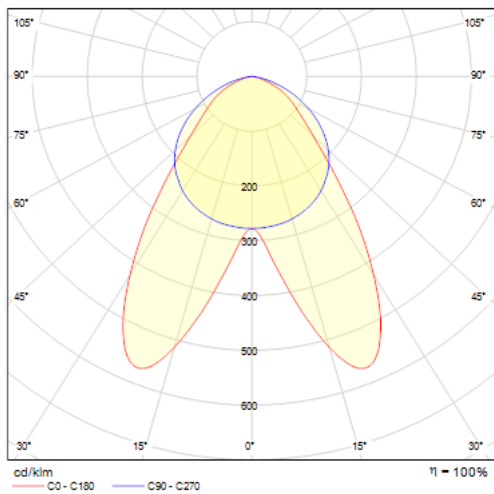

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	60 months
Dimensions (options)	1127 mm × 56 mm × 58 mm 1408 mm × 56 mm × 58 mm 1688 mm × 56 mm × 58 mm 1969 mm × 56 mm × 58 mm 2249 mm × 56 mm × 58 mm
Light source	LED MODUL
Type of optical system	double asymmetric
Luminous flux	~ 5 000 lm/m ± 10 % (4000 K)
Colour Temperature (options)	3000 K warm white / 4000 K cool white
Luminous efficacy	145 lm/W (4000 K)
MacAdam Light source	2
Colour rendering index	80
Luminaire power input	34.5 W/m ± 10 %
Connection of the luminaires (options)	- On/Off - DALI dimmable - optionaly + Emergency 1h/3h for chosen luminaires only
Electrical voltage	220-240V
Frequency	50-60Hz



 IP 54 $T_{a_{max.}}$: 40°C

Technical drawing

