



| | |
|------------------------------|-----------------------|
| Type of installation | Recessed, Surface |
| Light distribution | Direct |
| Colour of the luminaires | Black, White |
| Colour Temperature | 6500 K cool white |
| Material | Plastic |
| Light source | LED MODUL |
| Connection of the luminaires | ON/OFF + 3h emergency |
| Lifetime | L90/B50 50 000 hours |
| Warranty | 60 months |


Family

Stret

Luminaire family variants Stret



Stret

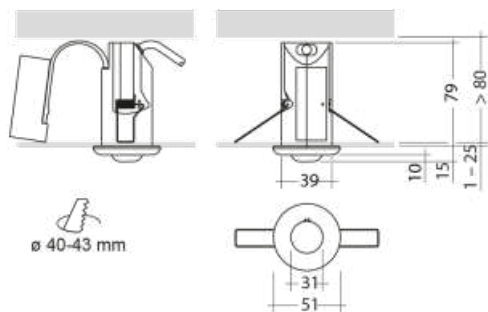

Assembly



Light distribution



Energy class

energy_class_g


Marks

| Code | Dimensions l/w/h (mm) | Power of the luminaire (W) | Luminous flux (lm) | Colour Temperature (K) | UGR |
|------------------------|--------------------------|-------------------------------|-----------------------|---------------------------|-----|
| 990-000B-10GEM3/865, W | ø 51 × 94 | 1.5 | 115 | 6500 | - |
| 990-000B-10GGM3/865, W | ø 51 × 94 | 2.5 | 206 | 6500 | - |

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

| | | |
|-------|---------------------------------|-----------------------|
| Notes | Colour of the luminaires | ● ● |
| | Colour Temperature | 6500 K cool white |
| | Optic system | Clear cover |
| | Connection of the luminaires | ON/OFF + 3h emergency |
| | Ra | 80 |

Stret

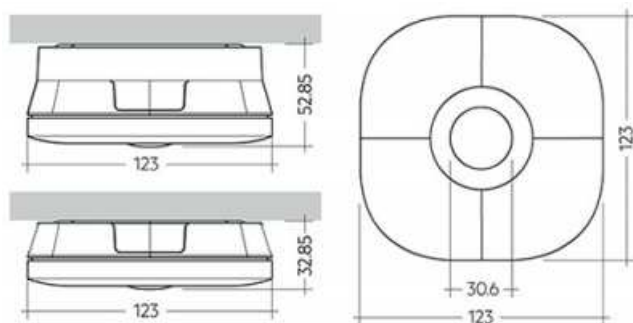

Assembly



Light distribution



Energy class

energy_class_g

Marks

| Code | Dimensions l/w/h (mm) | Power of the luminaire (W) | Luminous flux (lm) | Colour Temperature (K) | UGR |
|------------------------|--------------------------|-------------------------------|-----------------------|---------------------------|-----|
| 990-200B-10GGM3/865, W | 123 × 123 × 33 | 2.5 | 206 | 6500 | - |

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

| | | |
|-------|---------------------------------|-----------------------|
| Notes | Colour of the luminaires | ● ● |
| | Colour Temperature | 6500 K cool white |
| | Optic system | Clear cover |
| | Connection of the luminaires | ON/OFF + 3h emergency |
| | Ra | 80 |

Legend

Type of installation

| | | | |
|--|-------------------------|---|----------------------|
|  | Recessed lights |  | Wall mounted lights |
|  | Semi-recessed luminaire |  | Suspended lights |
|  | Surface lights |  | Free-standing lights |
|  | 3 circuit track lights |  | Table lamp lights |

Light distribution

| | |
|--|---------------------------|
|  | Direct luminaire |
|  | Direct-indirect luminaire |
|  | Indirect luminaire |

Light source

| | | | |
|--|---|---|---|
|  | Tunable White adjusting the color temperature |  | RealWhite true display of white color |
|  | RealColour true display of colors Ra≥97 |  | StrongColour highlight one color |

Marks

| | |
|--|---|
|  | Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable) |
|  | Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable) |
|  | Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation) |
|  | European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it |
|  | Luminaires are certified according to the European ENEC system |
|  | Recommended mounting hole size |

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

| | | | |
|----------|-------------------------------------|----------|---------------------------|
| B | Microprismatic system, low UGR | L | Plain aluminium reflector |
| C | Clear cover | M | Matt parabolic louvre |
| D | Asymmetric reflector | S | SPOT - narrow angle |
| E | Polished parabolic louvre, high LOR | U | MEDIUM - middle angle |
| F | FLOOD - wide angle | W | Wide beam angle |
| I | Microprismatic optical system | Z | Plastic louver, low UGR |
| K | Opal diffuser | | |

Electrical connection

| | | | |
|------------|---|-----------|---|
| /BT | Luminaires controlled via Bluetooth technology | P | Sensor and electronic ballast |
| D | DALI dimmable | T | By switch dimmable (touch dimm) |
| E | Electronic ballast non-dimmable | TD | DALI or by switch (touch dimm) dimmable |
| M | Electronic ballast non-dimmable with 1h emergency | U | Dimmable luminaire with dimmer on the luminaire |
| M3 | Electronic ballast non-dimmable with 3h emergency | | |

Colour

| | | | | | |
|-------------|---|-------------|---|-------------|---|
| W |  | B |  | S |  |
| 1021 |  | 2000 |  | 3020 |  |
| 5015 |  | 6018 |  | 7016 |  |
| 9006 |  | 9010 |  | | |

Značky typu

| | |
|---|--|
|  | Smart – Luminaire or the lighting system controlled by motion, daylight or via smart devices using Bluetooth technology |
|  | Acoustic – Luminaire with acoustic absorption properties which reduce disturbing noise and improve the acoustics of the room |
|  | Multiwatt – Luminaires with individually adjustable luminous flux using a special antenna or mobile application |

UGR UGR – The luminaire suitable for office spaces