
Luminaire

Lipo60-S

04-220I-20GED/840, S



Type of installation	Recessed, Surface, Wall mounted, Suspended
----------------------	--

Light distribution	Direct
--------------------	--------

Luminaire shape	Corner
-----------------	--------

Colour of the luminaires	Silver
--------------------------	--------

Material	Aluminium
----------	-----------

Lifetime	L80/B20 50 000 hours
----------	----------------------

Warranty	60 months
----------	-----------

Description of luminaires	Luminaire recessed/surface/wall mounted/suspended
---------------------------	---

Dimensions	603 mm × 603 mm × 67 mm
------------	-------------------------

Light source	LED MODUL
--------------	-----------

Type of optical system	Microprisma
------------------------	-------------

Luminous flux	2500 lm ± 10 %
---------------	----------------

Colour Temperature	4000 K cool white
--------------------	-------------------

Luminous efficacy test	111 lm/W
------------------------	----------

MacAdam Light source	2
----------------------	---

Colour rendering index	80
------------------------	----



Luminaire power input	22.5 W ± 10 %
-----------------------	---------------

Connection of the luminaires	DALI dimmable
------------------------------	---------------

Electrical voltage	220-240V
--------------------	----------

Frequency	50-60Hz
-----------	---------

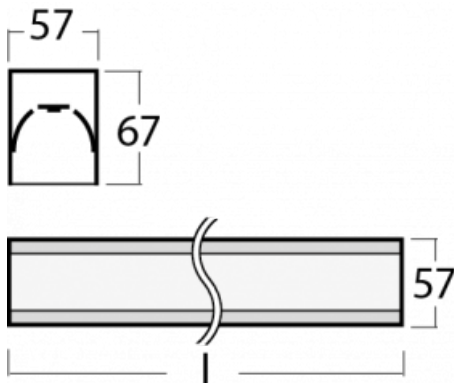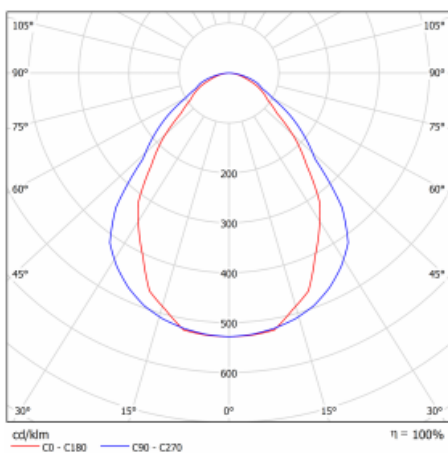


Technical drawing

Curve


Accessories


00-00300, N
wire suspension
2000mm



00-00301, N
wire suspension
4000mm



00-00302, N
wire suspension
6000mm



00-00350, K
cable 3x0,75 1000mm



00-00351, K
cable 4x0,75 1000mm



00-00352, K
cable 3x0,75 2000mm



00-00353, K
cable 4x0,75 2000mm



00-00354, K
cable 5x0,75 1000mm



00-00355, K
cable 5x0,75 2000mm



00-00358, K
cable 3x0,75 4000mm



00-00359, K
cable 4x0,75 4000mm



00-00360, K
cable 3x0,75 6000mm



00-00361, K
cable 4x0,75 6000mm



00-00370, B
ceiling cup 80x80x32mm



00-00370, S
ceiling cup 80x80x32mm



00-00370, W
ceiling cup 80x80x32mm



00-00600, F
ceiling fastening for
luminaires 132-5xxK,
04-2000x, 05-2000x,
09-200x - 1 piece



00-20700, B
2 pcs of wall fastening
Lipo/Lina



00-20700, S
2 pcs of wall fastening
Lipo/Lina



00-20700, W
2 pcs of wall fastening
Lipo/Lina



00-51300, B
set for suspension into
3-phase track, non-
dimmable luminaires



00-51300, S
set for suspension into
3-phase track, non-
dimmable luminaires



00-51300, W
set for suspension into
3-phase track, non-
dimmable luminaires




00-51301, B
set for suspension into
3-phase track, dimmable
luminaires



00-51301, S
set for suspension into
3-phase track, dimmable
luminaires



00-51301, W
set for suspension into
3-phase track, dimmable
luminaires



04-00200, N
straight connector




04-01200, F
Accessory for gear-tray
release



04-20100, B
2xend cap - metal, 3-
conductor terminal box,
grommet



04-20100, S
2xend cap - metal, 3-
conductor terminal box,
grommet



04-20100, W
2xend cap - metal, 3-
conductor terminal box,
grommet



04-20101, B
2xend cap - metal, 5-
conductor terminal box,
grommet



04-20101, S
2xend cap - metal, 5-
conductor terminal box,
grommet



04-20101, W
2xend cap - metal, 5-
conductor terminal box,
grommet



04-20900, F
bracket for installation
of suspended type of
profile as recessed
trimless