
Luminaire

Lipo60-S

04-220I-20GEE/830, S



Type of installation	Recessed, Surface, Wall mounted, Suspended
----------------------	--

Light distribution	Direct
--------------------	--------

Luminaire shape	Corner
-----------------	--------

Colour of the luminaires	Silver
--------------------------	--------

Material	Aluminium
----------	-----------

Lifetime	L80/B20 50 000 hours
----------	----------------------

Warranty	60 months
----------	-----------

Description of luminaires	Luminaire recessed/surface/wall mounted/suspended
---------------------------	---

Dimensions	603 mm × 603 mm × 67 mm
------------	-------------------------

Light source	LED MODUL
--------------	-----------

Type of optical system	Microprisma
------------------------	-------------

Luminous flux	2380 lm ± 10 %
---------------	----------------

Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy test	106 lm/W
------------------------	----------

MacAdam Light source	2
----------------------	---

Colour rendering index	80
------------------------	----



Luminaire power input	22.5 W ± 10 %
-----------------------	---------------

Connection of the luminaires	Electronic ballast non-dimmable
------------------------------	---------------------------------

Electrical voltage	220-240V
--------------------	----------

Frequency	50-60Hz
-----------	---------

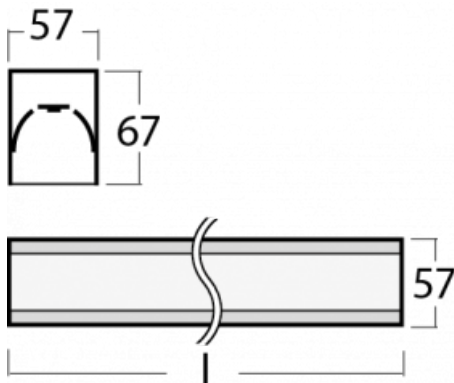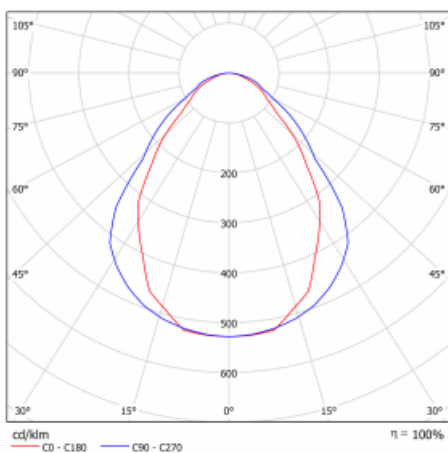


Technical drawing

Curve


Accessories

00-00300, N
 wire suspension
 2000mm

00-00301, N
 wire suspension
 4000mm

00-00302, N
 wire suspension
 6000mm

00-00350, K
 cable 3x0,75 1000mm

00-00351, K
 cable 4x0,75 1000mm

00-00352, K
 cable 3x0,75 2000mm

00-00353, K
 cable 4x0,75 2000mm

00-00354, K
 cable 5x0,75 1000mm

00-00355, K
 cable 5x0,75 2000mm

00-00358, K
 cable 3x0,75 4000mm

00-00359, K
 cable 4x0,75 4000mm

00-00360, K
 cable 3x0,75 6000mm

00-00361, K
 cable 4x0,75 6000mm

00-00370, B
 ceiling cup 80x80x32mm

00-00370, S
 ceiling cup 80x80x32mm

00-00370, W
 ceiling cup 80x80x32mm

00-00600, F
 ceiling fastening for
 luminaires 132-5xxK,
 04-2000x, 05-2000x,
 09-200x - 1 piece

00-20700, B
 2 pcs of wall fastening
 Lipo/Lina

00-20700, S
 2 pcs of wall fastening
 Lipo/Lina

00-20700, W
 2 pcs of wall fastening
 Lipo/Lina


00-51300, B
 set for suspension into
 3-phase track, non-
 dimmable luminaires

00-51300, S
 set for suspension into
 3-phase track, non-
 dimmable luminaires

00-51300, W
 set for suspension into
 3-phase track, non-
 dimmable luminaires

00-51301, B
 set for suspension into
 3-phase track, dimmable
 luminaires

00-51301, S
 set for suspension into
 3-phase track, dimmable
 luminaires

00-51301, W
 set for suspension into
 3-phase track, dimmable
 luminaires

04-00200, N
 straight connector

04-01200, F
 Accessory for gear-tray
 release


04-20100, B
 2xend cap - metal, 3-
 conductor terminal box,
 grommet

04-20100, S
 2xend cap - metal, 3-
 conductor terminal box,
 grommet

04-20100, W
 2xend cap - metal, 3-
 conductor terminal box,
 grommet

04-20101, B
 2xend cap - metal, 5-
 conductor terminal box,
 grommet

04-20101, S
 2xend cap - metal, 5-
 conductor terminal box,
 grommet

04-20101, W
 2xend cap - metal, 5-
 conductor terminal box,
 grommet

04-20900, F
 bracket for installation
 of suspended type of
 profile as recessed
 trimless