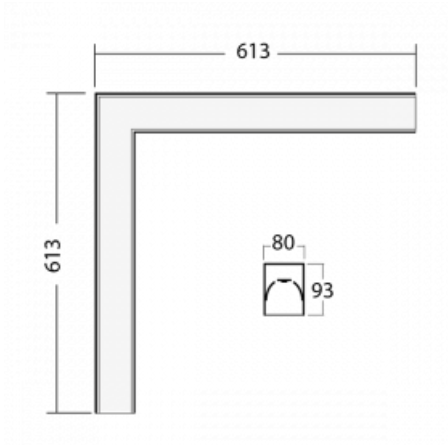



**Luminaire**

# Lipo80-S

05-220I-20GEE/830, B


**Technical drawing**


Type of installation	Recessed, Surface, Wall mounted, Suspended
Light distribution	Direct
Luminaire shape	Corner
Colour of the luminaires	Black
Material	Aluminium
Warranty	60 months
Description of luminaires	Luminaire recessed/surface/wall mounted/suspended
item description	pendant corner luminaire
Dimensions	603 mm × 603 mm × 93 mm
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	2670 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy test	122 lm/W
MacAdam Light source	2
Colour rendering index	80
Luminaire power input	21.8 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50-60Hz


**CE** IP 20

**Accessories**

**00-00200, N**  
 straight connector

**00-00300, N**  
 wire suspension  
 2000mm

**00-00301, N**  
 wire suspension  
 4000mm

**00-00302, N**  
 wire suspension  
 6000mm

**00-00350, K**  
 cable 3x0,75 1000mm

**00-00351, K**  
 cable 4x0,75 1000mm

**00-00352, K**  
 cable 3x0,75 2000mm

**00-00353, K**  
 cable 4x0,75 2000mm

**00-00358, K**  
 cable 3x0,75 4000mm


**00-00359, K**  
 cable 4x0,75 4000mm

**00-00360, K**  
 cable 3x0,75 6000mm

**00-00361, K**  
 cable 4x0,75 6000mm

**00-00370, B**  
 ceiling cup 80x80x32mm

**00-00600, F**  
 ceiling fastening for  
 luminaires 132-5xxK,  
 04-2000x, 05-2000x,  
 09-200x - 1 piece

**00-20100, B**  
 2xend cap - metal, 3-  
 conductor terminal box,  
 grommet

**00-20102, B**  
 2xend cap - plastic, 3-  
 conductor terminal box,  
 grommet

**00-20700, B**  
 2 pcs of wall fastening  
 Lipo/Lina

**00-20900, F**  
 bracket for installation  
 of suspended type of  
 profile as recessed  
 trimless

**00-21300, B**  
 pendant profile for track  
 luminaires; l = 1122mm

**00-21301, B**  
 pendant profile for track  
 luminaires; l = 2242mm

**00-51300, B**  
 set for suspension into  
 3-phase track, non-  
 dimmable luminaires