



## Luminaire

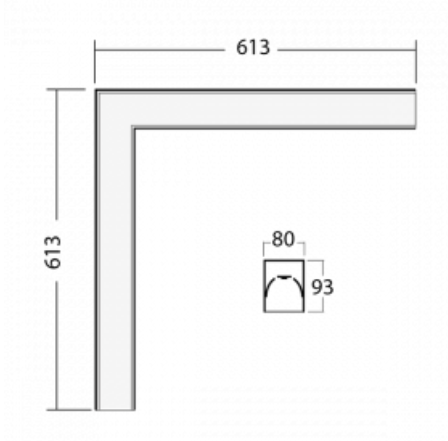
# Lipo80-S

05-220I-20GEE/840, W



You will appreciate the L-Click system on the Lipo80-S, which effectively saves you both time and money. How? The module simply clicks into the profile, so a lot of work is saved during assembly. This solution also prevents the direct touch of the LED technology and lengthens its operating life. The Lipo80-S lighting system with efficiency up to 125lm/W comes in recessed, ceiling mounted or suspended version. In addition, we offer installation through an aluminium profile joint that prevents translucence in luminaire joints. In addition to great power output, the luminaire also has a great price. It will find its use in commercial, social and public spaces.

## Technical drawing



Type of installation	Recessed, Surface, Wall mounted, Suspended
Light distribution	Direct
Luminaire shape	Corner
Colour of the luminaires	White
Material	Aluminium
Warranty	60 months
Description of luminaires	Luminaire recessed/surface/wall mounted/suspended
item description	pendant corner luminaire
Dimensions	603 mm × 603 mm × 93 mm
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	2820 lm ± 10 %
Colour Temperature	4000 K cool white
Luminous efficacy test	129 lm/W
MacAdam Light source	2
Colour rendering index	80
Luminaire power input	21.8 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50-60Hz

⊕ CE IP 20

**Accessories**

**00-00200, N**  
 straight connector

**00-00300, N**  
 wire suspension  
 2000mm

**00-00301, N**  
 wire suspension  
 4000mm

**00-00302, N**  
 wire suspension  
 6000mm

**00-00350, K**  
 cable 3x0,75 1000mm

**00-00351, K**  
 cable 4x0,75 1000mm

**00-00352, K**  
 cable 3x0,75 2000mm

**00-00353, K**  
 cable 4x0,75 2000mm



**00-00358, K**  
 cable 3x0,75 4000mm

**00-00359, K**  
 cable 4x0,75 4000mm

**00-00360, K**  
 cable 3x0,75 6000mm

**00-00361, K**  
 cable 4x0,75 6000mm

**00-00370, W**  
 ceiling cup 80x80x32mm

**00-00600, F**  
 ceiling fastening for  
 luminaires 132-5xxK,  
 04-2000x, 05-2000x,  
 09-200x - 1 piece

**00-20100, W**  
 2xend cap - metal, 3-  
 conductor terminal box,  
 grommet

**00-20102, W**  
 2xend cap - plastic, 3-  
 conductor terminal box,  
 grommet

**00-20700, W**  
 2 pcs of wall fastening  
 Lipo/Lina

**00-20900, F**  
 bracket for installation  
 of suspended type of  
 profile as recessed  
 trimless

**00-21300, W**  
 pendant profile for track  
 luminaires; l = 1122mm

**00-21301, W**  
 pendant profile for track  
 luminaires; l = 2242mm

**00-51300, W**  
 set for suspension into  
 3-phase track, non-  
 dimmable luminaires