



## Luminaire


# Lipo80-S

05S-000I-25GEE/840, W



You will appreciate the L-Click system on the Lipo80-S, which effectively saves you both time and money. How? The module simply clicks into the profile, so a lot of work is saved during assembly. This solution also prevents the direct touch of the LED technology and lengthens its operating life. The Lipo80-S lighting system with efficiency up to 125lm/W comes in recessed, ceiling mounted or suspended version. In addition, we offer installation through an aluminium profile joint that prevents translucence in luminaire joints. In addition to great power output, the luminaire also has a great price. It will find its use in commercial, social and public spaces.

## Technical drawing

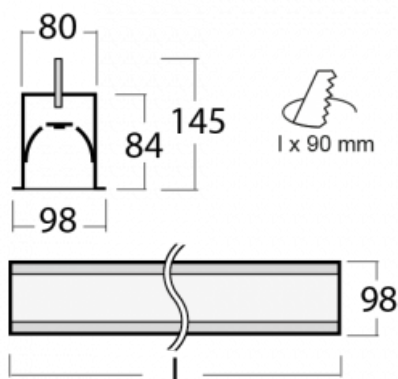

Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
Dimensions	1403 mm × 98 mm × 84 mm
Weight	0.9 kg
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	1320 lm ± 10 %
Colour Temperature	4000 K cool white
Luminous efficacy test	135 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	18.8

Luminaire power input 9.8 W  $\pm$  10 %

---

Connection of the luminaires Electronic ballast non-dimmable

---

Electrical voltage 220-240V

---

Frequency 50-60Hz

---

 **CE** IP 40

## Downloads

Installation instructions



Photos



## Accessories



**00-00100, W**  
2xend cap - metal, 3-  
conductor terminal box,  
grommet; Lipo80



**00-00200, N**  
straight connector



**00-00500**  
wire for emergency  
lighting XX-XXXX-20



**00-01200, F**  
Accessory for gear-tray  
release