



## Luminaire

# Ilbi

108-301K-40GEE/830, S



When Matúš Opálka closed himself into his study for a month, we were wondering what he would come up with. He designed lighting that gives off a gentle but luxurious effect. The indirect two-sided emission with reflection from the wall creates a pleasantly soft light with adjustable intensity. The aluminum profile has been fitted with powerful LED boards. We offer a separate wall-mounted luminaire in black, silver and white embodiment. If you are looking to light up meeting rooms, all kinds of corridors, halls, conference and banquet halls, the Ilbi is for you.

Design Matúš Opálka

## Technical drawing



Type of installation	Surface, Wall mounted, Suspended
Light distribution	Indirect
Luminaire shape	Angular
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted/suspended
item description	independent luminaire

Dimensions	1176 mm × 37 mm × 106 mm
Weight	3.7 kg
Light source	LED MODUL

Type of optical system	Opal diffuser
------------------------	---------------

Luminous flux	4090 lm ± 10 %
---------------	----------------

Colour Temperature	3000 K warm white
--------------------	-------------------


Luminous efficacy test	99 lm/W
------------------------	---------

MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H Y=8H, $\rho=70,50,20$	30
--	----

## Curve

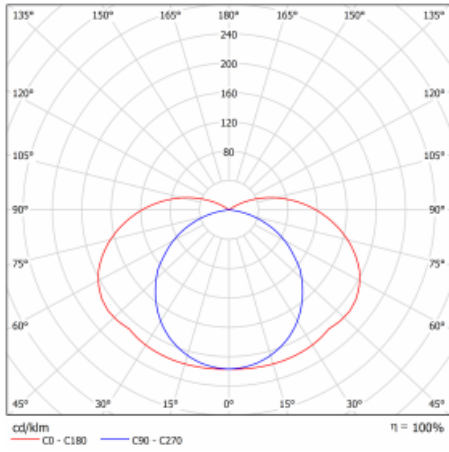

Luminaire power input 41.4 W  $\pm$  10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50-60Hz

  IP 20

## Downloads

Installation instructions



Photos



**Accessories**


**00-00350, K**  
cable 3x0,75 1000mm



**00-00351, K**  
cable 4x0,75 1000mm



**00-00352, K**  
cable 3x0,75 2000mm



**00-00353, K**  
cable 4x0,75 2000mm



**00-00354, K**  
cable 5x0,75 1000mm



**00-00355, K**  
cable 5x0,75 2000mm



**00-00370, S**  
ceiling cup 80x80x32mm



**01-0007, N**  
wire suspension  
2000mm



**108-0002, F**  
wall fastening for  
108-301K