



## Luminaire

# Ilbi


108-301K-40GEE/840, S



When Matúš Opálka closed himself into his study for a month, we were wondering what he would come up with. He designed lighting that gives off a gentle but luxurious effect. The indirect two-sided emission with reflection from the wall creates a pleasantly soft light with adjustable intensity.

Design Matúš Opálka

## Technical drawing

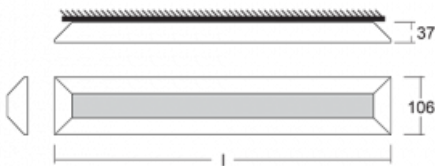

Type of installation	Surface, Wall mounted, Suspended
Light distribution	Indirect
Luminaire shape	Angular
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted/suspended
item description	independent luminaire

Dimensions	1176 mm × 37 mm × 106 mm
Weight	3.7 kg
Light source	LED MODUL

Type of optical system	Opal diffuser
------------------------	---------------

Luminous flux	4280 lm ± 10 %
---------------	----------------

Colour Temperature	4000 K cool white
--------------------	-------------------


Luminous efficacy test	103 lm/W
------------------------	----------

MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H Y=8H, $\theta=70,50,20$	30.4
--	------

## Curve

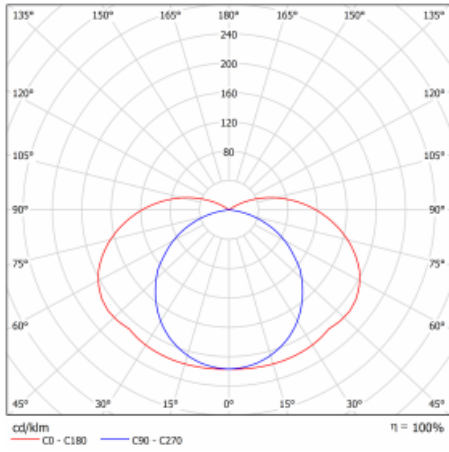

Luminaire power input 41.4 W  $\pm$  10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50-60Hz

⊕ CE IP 20

## Downloads

Installation instructions



Photos



**Accessories****00-00350, K**  
cable 3x0,75 1000mm**00-00351, K**  
cable 4x0,75 1000mm**00-00352, K**  
cable 3x0,75 2000mm**00-00353, K**  
cable 4x0,75 2000mm**00-00354, K**  
cable 5x0,75 1000mm**00-00355, K**  
cable 5x0,75 2000mm**00-00370, S**  
ceiling cup 80x80x32mm**01-0007, N**  
wire suspension  
2000mm**108-0002, F**  
wall fastening for  
108-301K