



## Luminaire

# Indi

108-511K-47FSD/830, W




When Matúš Opálka closed himself into his study for a month, we were wondering what he would come up with. He designed lighting that gives off a gentle but luxurious effect. The Indi luminaire has received many awards for its appearance. Let's name the three most important ones – Red Dot Award, the iF Design Award and the German Design Award. If you are looking to light up meeting rooms, all kinds of corridors, halls, conference and banquet halls, the Indi is for you. The aluminum profile has been fitted with powerful LED boards. The indirect two-sided emission with reflection from the wall creates a pleasantly soft light with adjustable intensity. Our tip: Multiple Indi circular luminaires suspended in a room will give it an attractive appearance.

Design Matúš Opálka

Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	ø 1500 mm × 106 mm
Weight	16.5 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	12430 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy test	72 lm/W
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	17.3

## Technical drawing

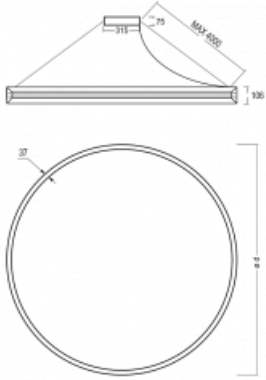

Luminaire power input 173.7 W  $\pm$  10 %


Connection of the luminaires DALI dimmable

Electrical voltage 220-240V

Frequency 50-60Hz

⊕ CE IP 20

## Curve

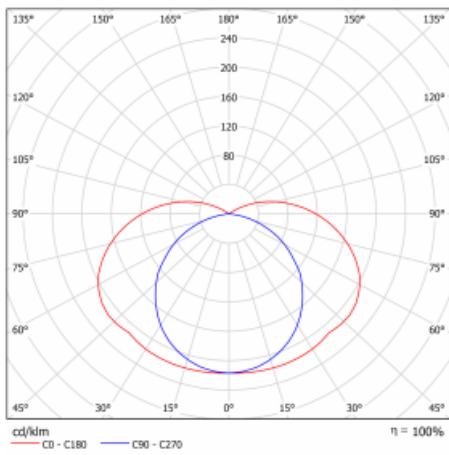

## Downloads

Installation instructions



Photos



## Accessories



**108-0004**  
Tie-down strap for  
INDI circle