



## Luminaire


# Alumo60

114-500I-40GEE/830, W



The Alumo60 family of luminaires confirms that there is power in simplicity. They combine functionality and a designer element. The square or rectangular format with open space in the middle adds lightness to the interior. We produce Alumo in various sizes, with opal diffuser or microprism. Luminaires are appropriate for social and prestigious locations and households. But they also find use in commercial spaces. Playing around with them will allow you to create some appealing lighting setups.

## Technical drawing

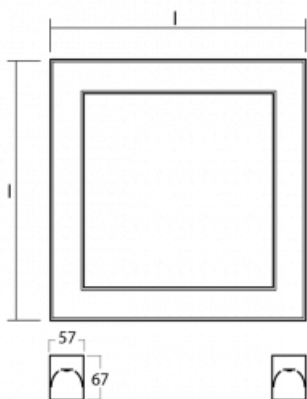

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Angular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	618 mm × 618 mm × 67 mm
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	4760 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy test	108 lm/W
MacAdam Light source	3
Colour rendering index	80
Luminaire power input	43.9 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50-60Hz

⊥ CE IP 20

## Downloads

Installation instructions



Photos

