



Luminaire


Alumo60

114-500K-40GGE/830, W



The Alumo60 family of luminaires confirms that there is power in simplicity. They combine functionality and a designer element. The square or rectangular format with open space in the middle adds lightness to the interior. We produce Alumo in various sizes, with opal diffuser or microprism.

Technical drawing

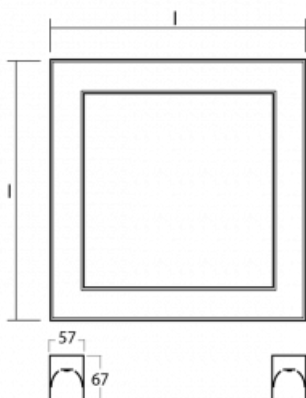

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Angular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	618 mm × 618 mm × 67 mm
Weight	5.5 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	5910 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy test	92 lm/W
MacAdam Light source	3
Colour rendering index	80

Luminaire power input 63.9 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50-60Hz

 **CE** IP 20

Downloads

Installation instructions



Photos

