

## Luminaire


# Alumo60

114-510I-60GGE/830, B



The Alumo60 family of luminaires confirms that there is power in simplicity. They combine functionality and a designer element. The square or rectangular format with open space in the middle adds lightness to the interior. We produce Alumo in various sizes, with opal diffuser or microprism. Luminaires are appropriate for social and prestigious locations and households. But they also find use in commercial spaces. Playing around with them will allow you to create some appealing lighting setups.

## Technical drawing

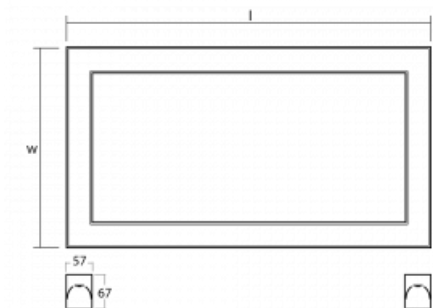

|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Suspended            |
| Light distribution        | Direct               |
| Luminaire shape           | Angular              |
| Colour of the luminaires  | Black                |
| Material                  | Aluminium            |
| Lifetime                  | L80/B20 50 000 hours |
| Warranty                  | 60 months            |
| Description of luminaires | Luminaire suspended  |

|              |                          |
|--------------|--------------------------|
| Dimensions   | 1178 mm × 618 mm × 67 mm |
| Light source | LED MODUL                |

|                        |                   |
|------------------------|-------------------|
| Type of optical system | Microprisma       |
| Luminous flux          | 9970 lm ± 10 %    |
| Colour Temperature     | 3000 K warm white |
| Luminous efficacy test | 104 lm/W          |

|                        |    |
|------------------------|----|
| MacAdam Light source   | 3  |
| Colour rendering index | 80 |

|                       |               |
|-----------------------|---------------|
| Luminaire power input | 95.9 W ± 10 % |
|-----------------------|---------------|

|                              |                                 |
|------------------------------|---------------------------------|
| Connection of the luminaires | Electronic ballast non-dimmable |
|------------------------------|---------------------------------|

|                    |          |
|--------------------|----------|
| Electrical voltage | 220-240V |
|--------------------|----------|

|           |         |
|-----------|---------|
| Frequency | 50-60Hz |
|-----------|---------|

⊥ CE IP 20

## Downloads

Installation instructions



Photos

