



Luminaire


Alumo60

114-510I-60GGE/830, S



The Alumo60 family of luminaires confirms that there is power in simplicity. They combine functionality and a designer element. The square or rectangular format with open space in the middle adds lightness to the interior. We produce Alumo in various sizes, with opal diffuser or microprism.

Technical drawing

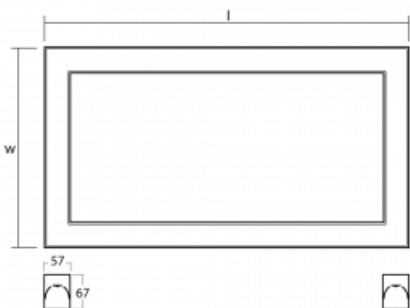

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Angular
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended

Dimensions	1178 mm × 618 mm × 67 mm
Light source	LED MODUL

Type of optical system	Microprisma
------------------------	-------------

Luminous flux	9970 lm ± 10 %
---------------	----------------

Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy test	104 lm/W
------------------------	----------

MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

Luminaire power input	95.9 W ± 10 %
-----------------------	---------------

Connection of the luminaires	Electronic ballast non-dimmable
------------------------------	---------------------------------

Electrical voltage	220-240V
--------------------	----------

Frequency	50-60Hz
-----------	---------

⊥ CE IP 20

Downloads

Installation instructions



Photos

