

Luminaire


Alumo80

118-510K-60GGE/840, B



The Alumo80 family of luminaires confirms that there is power in simplicity. They combine functionality and a designer element. The square or rectangular format with open space in the middle adds lightness to the interior. We produce Alumo in various sizes, with opal diffuser or microprism. Luminaires are good for social and prestigious locations and households. But they also find use in commercial spaces. Playing around with them will allow you to create some appealing lighting setups.

Technical drawing

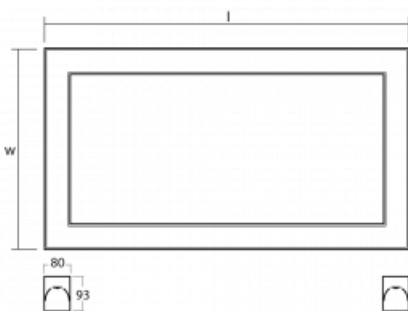

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Angular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	1200 mm × 640 mm × 93 mm
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	10860 lm ± 10 %
Colour Temperature	4000 K cool white
Luminous efficacy test	113 lm/W
MacAdam Light source	3
Colour rendering index	80
Luminaire power input	95.9 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50-60Hz

⊥ CE IP 20

Downloads

Installation instructions



Photos

