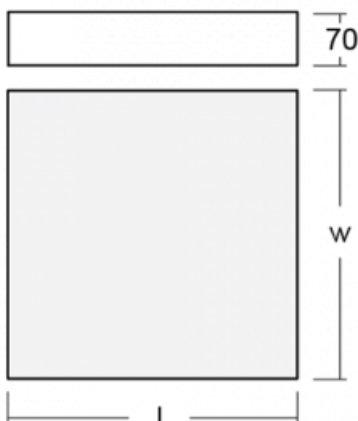



**Luminaire**

# Kvado

**119-214K-40GEE/840, W**


We were after only one thing when designing the Kvado luminaire: beauty in simplicity. And so square and rectangular luminaires were created for pendant or flush-mount direct illumination. The opal diffuser or microprism housing is framed within an aluminum profile, adding elegance to the luminaire without compromising design clarity. In the Kvado family, you can easily choose a square or rectangular luminaire with a profile height of 70 or 129 mm. In a range of colours and power versions, flush-mount, wall and pendant models, the Kvado family of luminaires are ideal for hotel lobbies, entrance halls, offices, shops and households.

**Technical drawing**


Type of installation	Surface, Wall mounted, Suspended
Light distribution	Direct
Luminaire shape	Angular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted/suspended
Dimensions	600 mm × 600 mm × 70 mm
Weight	8 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	4680 lm ± 10 %
Colour Temperature	4000 K cool white
MacAdam Light source	3
Colour rendering index	80
Luminaire power input	34.1 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50-60Hz



 IP 20

## Downloads

Installation instructions



Photos



**Accessories**


**00-00331, W**  
suspension set 2000mm, 4  
pcs.of wires, cable 4x0,75mm,  
ceiling cup



**00-00333, W**  
suspension set  
2000mm, 4 pcs.of wires,  
cable 5x0,75mm, ceiling  
cup



**00-00338, W**  
suspension set  
4000mm, 4 pcs.of wires,  
cable 4x0,75mm, ceiling  
cup




**00-00340, W**  
suspension set  
4000mm, 4 pcs.of wires,  
cable 5x0,75mm, ceiling  
cup



**00-00342, W**  
suspension set  
6000mm, 4 pcs.of wires,  
cable 4x0,75mm, ceiling  
cup



**00-00344, W**  
suspension set  
6000mm, 4 pcs.of wires,  
cable 5x0,75mm, ceiling  
cup



**19-0009, W**  
Mounting distance kit for square  
luminaire, circular 370 mm