



Luminaire


Rotao

127-580K-10GGD/840, W



With Rotao designer luminaires, we surrender to the geometric beauty of the ellipse. A circular plan attracts attention. The inner opening also optically lightens commercial, office and home spaces. We placed an LED light source in the luminaire with an efficiency of up to 150 lm / W, which is hidden behind an opal diffuser in an aluminum profile. The profile is treated with baked powder paint in three shades - unobtrusive white, elegant gray and timeless black.


Technical drawing

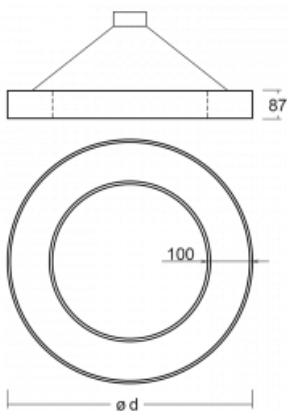

Type of installation	Suspended
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
Dimensions	ø 850 mm × 87 mm
Weight	8.5 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	5440 lm ± 10 %
Colour Temperature	4000 K cool white
MacAdam Light source	3
Colour rendering index	80
Luminaire power input	49 W ± 10 %
Connection of the luminaires	DALI dimmable
Electrical voltage	220-240V
Frequency	50-60Hz

 **CE** IP 20

Curve

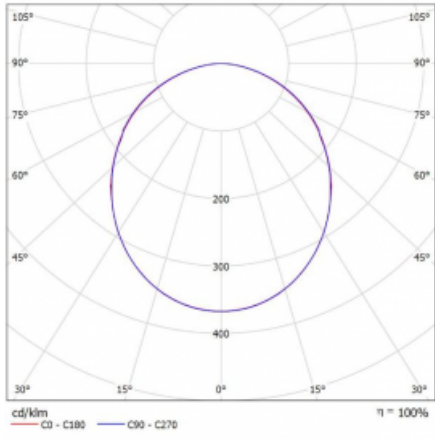

Downloads

Installation instructions



Photos

