
**Luminaire**

# Sant-S

**132S-520K-20GGE/830, B**


The Dutch designer Rob van Beek imbued this LED linear luminaire with an opal diffuser with a universal visage. In the Czech Republic, Sant-S was specially made for LED sources and Human Centric Lighting technology. In practice, it looks like the light changes intensity and color temperature according to biological rhythms. People thus feel natural in closed spaces, because the lighting simulates daylight. If you are looking for system linear lights for an office, school or hospital, you've just found it. We've added a high efficiency of up to 150 lm / W and low consumption due to dimmability to the attractive appearance. The direct-indirect light glows nicely, does not blind the eyes and thus induces visual well-being. Using Tunable White technology, you choose a white color temperature from 2700K to 6500K. The luminaire looks great suspended separately as well as in a continuous lighting system. You can suspend, install, or embed in tracks a hundred, or let's not skimp, how 'bout a thousand Sant luminaires.

**Design** Rob van Beek

Type of installation	Surface, Wall mounted, Suspended
Light distribution	Direct-indirect
Luminaire shape	Corner
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire surface/wall mounted/suspended
Dimensions	603 mm × 603 mm × 92 mm
Weight	3.2 kg
Light source	LED MODUL
Type of optical system	Opal diffuser
Luminous flux	3400 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy test	97 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	21.3

## Technical drawing



Luminaire power input 34.9 W  $\pm$  10 %


Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50-60Hz

   IP 20

## Curve

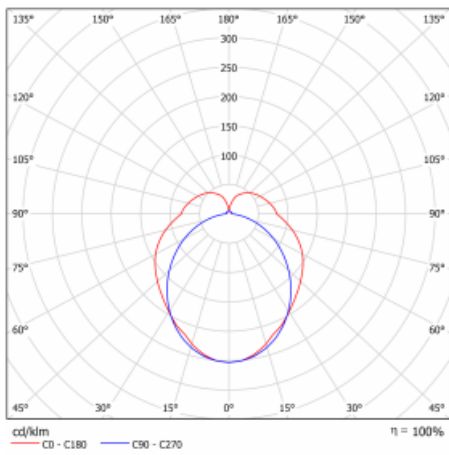

## Downloads

Installation instructions



Photos



**Accessories**


**00-00300, N**  
wire suspension  
2000mm



**00-00301, N**  
wire suspension  
4000mm



**00-00302, N**  
wire suspension  
6000mm



**00-00350, K**  
cable 3x0,75 1000mm



**00-00351, K**  
cable 4x0,75 1000mm



**00-00352, K**  
cable 3x0,75 2000mm



**00-00353, K**  
cable 4x0,75 2000mm



**00-00354, K**  
cable 5x0,75 1000mm



**00-00355, K**  
cable 5x0,75 2000mm



**00-00370, B**  
ceiling cup 80x80x32mm



**00-00600, F**  
ceiling fastening for  
luminaires 132-5xxK,  
04-2000x, 05-2000x,  
09-200x - 1 piece



**132-50031, B**  
pendant profile 1000  
mm



**132-50100, B**  
end cap



**132-50200, F**  
straight connector



**132-51100, K**  
diffuser 2295 mm