



Luminaire

Lina45


45-501I-20GGE/830, W



EPD®


The Lina45 luminaires with direct or direct-indirect distribution of light are made of aluminium profile and come in a pendant or surface version. The lower part of the luminaire contains optical components and the upper part contains electrical components as well as the indirect part of the LED light sources. You can buy a version with an optical lens in combination with a plastic louver, which makes the luminaires best suited for offices or spaces with a similarly high demand for an anti-glare solution. We also offer a version with an opal cover or microprismatic optics. You can also choose whether you prefer metal end caps or plastic ones without visible screws.

Technical drawing

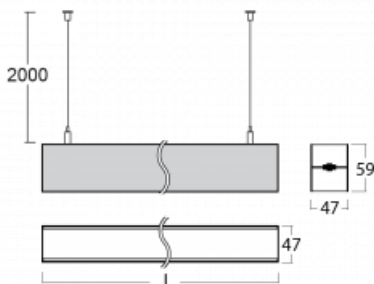

Type of installation	Suspended
Light distribution	Direct-indirect
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire suspended
item description	64/36
Dimensions	1122 mm × 47 mm × 59 mm
Weight	2.2 kg
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	3070 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy	85 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	18.7

Curve

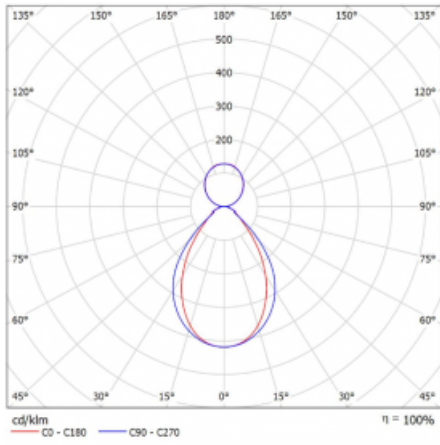

Luminaire power input 36 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

Downloads

Installation instructions



Photos

