



Luminaire


Ravo

55-060C-10GHE/830, W



The Ravo family of luminaires works with the beauty of oval shapes. This circular luminaire with compact downlight bulbs is designed for LED power sources with efficiency up to 130 lm / W. We produced the lighting from polycarbonate plastic and a passive aluminum cooler. IP 40 or IP 44 protection in a clear or structured plexiglass version protects against the penetration of water and other substances. The Ravo wide-beam angle luminaire is a good solution for both commercial and public spaces, car showrooms and shop windows.

Technical drawing

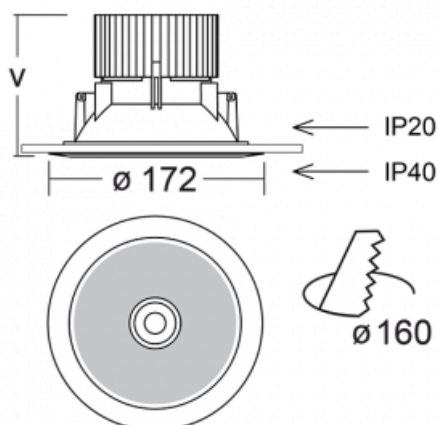

Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	White
Material	Plastic
Lifetime	L80/B10 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire recessed
Dimensions	ø 172 mm × 80 mm
Weight	0.85 kg
Light source	LED MODUL
Type of optical system	Clear cover
Luminous flux	2650 lm ± 10 %
Colour Temperature	3000 K warm white
Luminous efficacy test	114 lm/W
MacAdam Light source	3
Colour rendering index	80

Luminaire power input 23.3 W \pm 10 %

Connection of the luminaires Electronic ballast non-dimmable

Electrical voltage 220-240V

Frequency 50-60Hz

 **CE** IP 40

Downloads

Installation instructions



Photos



Accessories



55-0002, W