


Type of installation	Surface
Light distribution	Direct
Colour of the luminaires	Silver
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	3
Connection of the luminaires	ON/OFF DALI
Lifetime	L80/B20 50 000 hours
Warranty	60 months


## Family

# Fini

An independent luminaire, Fini, is an invisible luminaire which will enhance the atmosphere of any interior. The luminaires are adjustable thanks to which you will achieve an ideal light effect, moreover, without any shadows. Install any number of independent luminaires in a row at lengths of 850 mm, 1130 mm, 1410 mm or 1690 mm. We offer three levels of luminous flux, a tuneable white version and an important IP40 housing for spaces where dust may accumulate.

## Luminaire family variants Fini

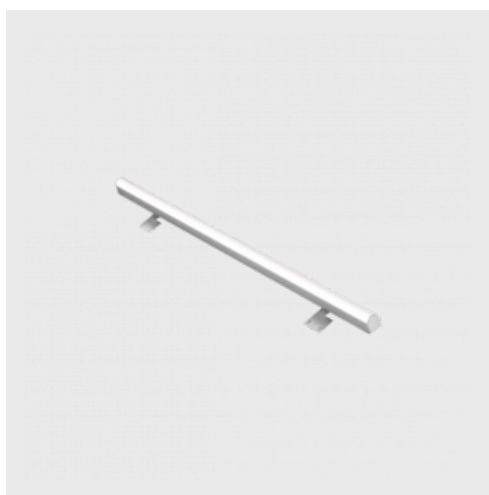

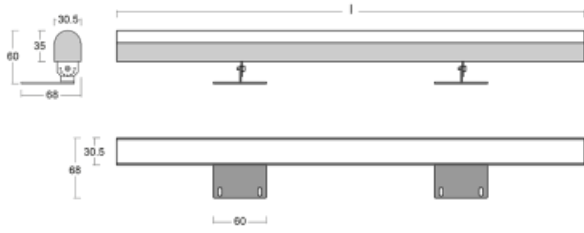**Fini**

**Assembly**

**Light distribution**

**Energy class**


A++, A+, A

**Marks**


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
160-202K-15GEE/840, E	850 × 68 × 60	11.2	1450	4000	-
160-202K-15GGE/840, E	850 × 68 × 60	15.8	2000	4000	-
160-202K-15GHE/840, E	850 × 68 × 60	31.4	3650	4000	-
160-202K-20GEE/840, E	1130 × 68 × 60	14.8	1950	4000	-
160-202K-20GGE/840, E	1130 × 68 × 60	20.8	2650	4000	-
160-202K-20GHE/840, E	1130 × 68 × 60	41.8	4900	4000	-
160-202K-25GEE/840, E	1410 × 68 × 60	18.8	2500	4000	-
160-202K-25GGE/840, E	1410 × 68 × 60	27.7	3340	4000	-
160-202K-25GHE/840, E	1410 × 68 × 60	52.3	6100	4000	-
160-202K-30GEE/840, E	1690 × 68 × 60	22.4	2950	4000	-
160-202K-30GGE/840, E	1690 × 68 × 60	31.3	4000	4000	-
160-202K-30GHE/840, E	1690 × 68 × 60	63.2	7300	4000	-

These codes represent luminaires without a profile with chromaticity temperature 4000K and opal diffuser.









## Notes

Colour of the luminaires	
Colour Temperature	3000 K warm white 4000 K cool white
Optic system	Opal diffuser
Connection of the luminaires	ON/OFF DALI
Ra	80




Luminaires come complete with all necessary accessories.

## Legend

### Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights

### Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

### Light source

	<b>Tunable White</b> adjusting the color temperature		<b>RealWhite</b> true display of white color
	<b>RealColour</b> true display of colors Ra≥97		<b>StrongColour</b> highlight one color

### Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

### Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

### Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		