

Family

Global Trac





Type of installation Recessed, Surface, Suspended

Light distribution Direct




Colour of the
luminaires White

Material Aluminium

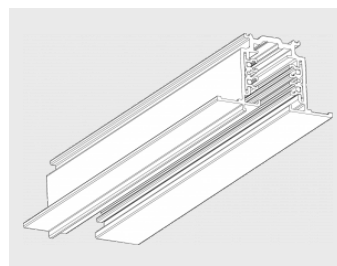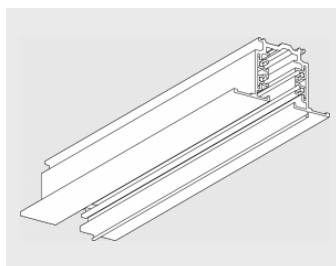


Luminaire family variants Global Trac





Global Trac on/off

| | | | |
|-------|--------------------------|---|---|
| | | Assembly | Light distribution |
| | |  |  |
| | | Energy class | Marks |
| | | energy_class_g | |
| Notes | Colour of the luminaires |  | |
| | Ra | 0 | |

Global Trac DALI

| | | | |
|-------|--------------------------|---|---|
| | | Assembly | Light distribution |
| | |  |  |
| | | Energy class | Marks |
| | | energy_class_g | |
| Notes | Colour of the luminaires |  | |
| | Ra | 0 | |

Global Trac on/off

| | | | |
|--|--|---|---|
| | | Assembly | Light distribution |
| | |  |  |
| | | Energy class | Marks |
| | | energy_class_g | |

| | | |
|-------|--------------------------|--|
| Notes | Colour of the luminaires | <div><div></div><div></div><div></div></div> |
| | Ra | 0 |

Global Trac DALI

Assembly

Light distribution



Energy class


Marks

energy_class_g


| | | |
|-------|--------------------------|--|
| Notes | Colour of the luminaires | <div><div></div><div></div><div></div></div> |
| | Ra | 0 |

Legend

Type of installation

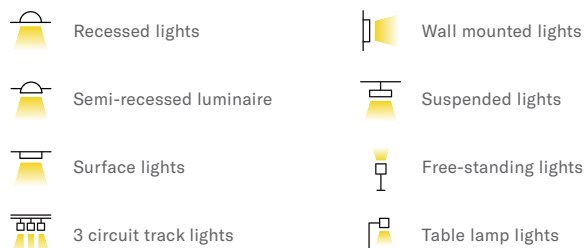


Light distribution



Light source



Marks

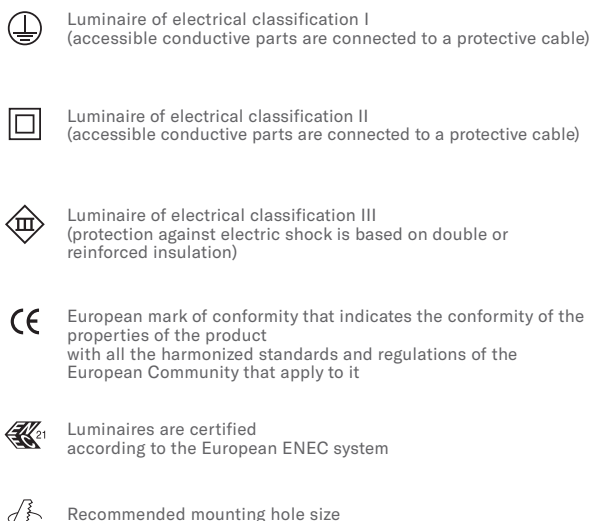

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

| | | | |
|---|-------------------------------------|---|---------------------------|
| B | Microprismatic system, low UGR | L | Plain aluminium reflector |
| C | Clear cover | M | Matt parabolic louvre |
| D | Asymmetric reflector | S | SPOT - narrow angle |
| E | Polished parabolic louvre, high LOR | U | MEDIUM - middle angle |
| F | FLOOD - wide angle | W | Wide beam angle |
| I | Microprismatic optical system | Z | Plastic louver, low UGR |
| K | Opal diffuser | | |


Electrical connection

| | | | |
|-----|---|----|---|
| /BT | Luminaires controlled via Bluetooth technology | P | Sensor and electronic ballast |
| D | DALI dimmable | T | By switch dimmable (touch dimm) |
| E | Electronic ballast non-dimmable | TD | DALI or by switch (touch dimm) dimmable |
| M | Electronic ballast non-dimmable with 1h emergency | U | Dimmable luminaire with dimmer on the luminaire |
| M3 | Electronic ballast non-dimmable with 3h emergency | | |

Colour

| | | | | | |
|------|--|------|--|------|--|
| W |  RAL 9003 | B |  RAL 9005 | S |  TIGER 09/90530 |
| 1021 |  RAL 1021 | 2000 |  RAL 2000 | 3020 |  RAL 3020 |
| 5015 |  RAL 5015 | 6018 |  RAL 6018 | 7016 |  RAL 7016 |
| 9006 |  RAL 9006 | 9010 |  RAL 9010 | | |

Značky typu

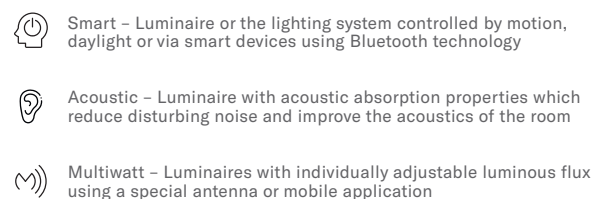

UGR UGR – The luminaire suitable for office spaces