




Type of installation	Wall mounted
Light distribution	Indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white, 3500 K neutral white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	3
Connection of the luminaires	ON/OFF Other type of dimming
Lifetime	L80/B20 50 000 hours
Warranty	60 months


Family

Ilbi+

Combining maximum usefulness with the minimalist design of Matúš Opalka gives you the Ilbi+ family of lighting. We have, moreover, added a dual function. In addition to lighting up the room indirectly, it charges electronic devices through an integrated USB port and acts as a suspension system for inserting hooks, handles or shelves. You can hang your clothes, place books, hang kitchen utensils, lay a towel or other everyday necessities on the luminaire. Ilbi+ luminaires are great for hotels, households, meeting rooms, and thanks to their IP 44 housing also for wellness centers, bathrooms and swimming pool dressing rooms.

Luminaire family variants Ilbi+

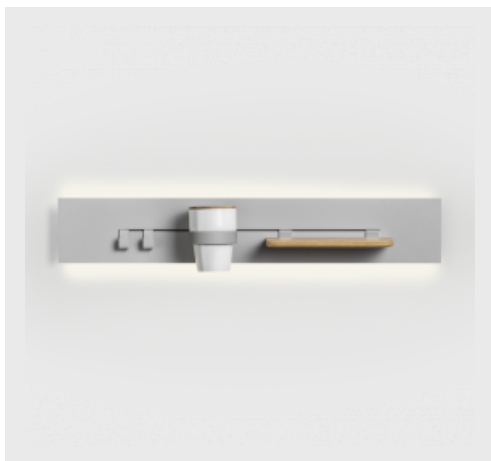

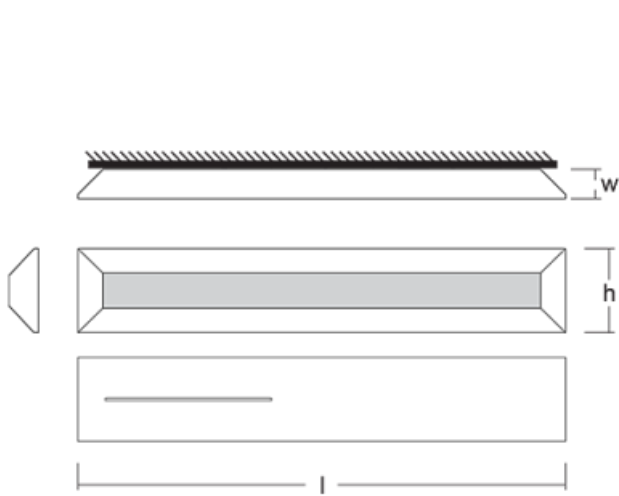Ilbi+

Assembly

Light distribution


Energy class

A++, A+, A

Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
109-321K-20GEE/840, W	616 × 37 × 106	21.9	2140	4000	< 28.5
109-301K-30GEE/840, W	896 × 37 × 106	31.1	3210	4000	< 28.6
109-311K-30GEE/840, W	896 × 37 × 106	31.1	3210	4000	< 28.6
109-301K-40GEE/840, W	1176 × 37 × 106	41.4	4280	4000	< 28.7
109-311K-40GEE/840, W	1176 × 37 × 106	41.4	4280	4000	< 28.7

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 3500 K neutral white
	Optic system	Opal diffuser
	Connection of the luminaires	ON/OFF Other type of dimming
	Ra	80

Wall fastenings must be ordered for the luminaires. Option of ordering shelves, cups, and hanging hooks.

Ilbi+
Assembly

Light distribution


Energy class

A++, A+, A

Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
109-331K-40GEE/840, W	1176 × 37 × 106	41.4	4280	4000	-
109-341K-40GEE/840, W	1176 × 37 × 106	41.4	4280	4000	-









AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Opal diffuser
	Connection of the luminaires	ON/OFF
	Ra	80




Wall fastenings must be ordered for the luminaires. Option of ordering shelves, cups, and hanging hooks.

Legend

Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights


Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

Light source

	Tunable White adjusting the color temperature		RealWhite true display of white color
	RealColour true display of colors Ra≥97		StrongColour highlight one color

Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		