



## Family

# Ilbi

When Matúš Opálka closed himself into his study for a month, we were wondering what he would come up with. He designed lighting that gives off a gentle but luxurious effect. The indirect two-sided emission with reflection from the wall creates a pleasantly soft light with adjustable intensity.

Type of installation	Surface, Wall mounted, Suspended
----------------------	----------------------------------

Light distribution	Indirect
--------------------	----------

Colour of the luminaires	Black, Silver, White
--------------------------	----------------------

Colour Temperature	3000 K warm white, 4000 K cool white
--------------------	--------------------------------------

Material	Aluminium
----------	-----------

Light source	LED MODUL
--------------	-----------

Connection of the luminaires	ON/OFF DALI Other type of dimming
------------------------------	---

Lifetime	L80/B20 0 hours
----------	-----------------

## Luminaire family variants Ilbi



Ilbi

Assembly



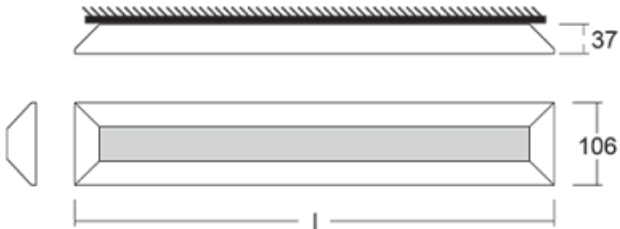
Light distribution



Energy class

A++, A+, A

Marks



Notes

Colour of the luminaires

Colour Temperature 3000 K warm white  
4000 K cool white

Optic system Opal diffuser

Connection of the luminaires ON/OFF  
DALI  
Other type of dimming

Ra 80

**Accessories**


Code	Description
00-00352, K	cable 3x0,75 2000mm
00-00353, K	cable 4x0,75 2000mm
00-00355, K	cable 5x0,75 2000mm
00-00354, K	cable 5x0,75 1000mm
00-00350, K	cable 3x0,75 1000mm
00-00351, K	cable 4x0,75 1000mm









Code	Description
00-00370, W	ceiling cup 80x80x32mm

**Notes**




 Accessories colour

## Legend





### Type of installation

 Recessed lights	 Wall mounted lights
 Semi-recessed luminaire	 Suspended lights
 Surface lights	 Free-standing lights
 3 circuit track lights	 Table lamp lights






### Light distribution

 Direct luminaire
 Direct-indirect luminaire
 Indirect luminaire

### Light source

 <b>Tunable White</b> adjusting the color temperature	 <b>RealWhite</b> true display of white color
 <b>RealColour</b> true display of colors Ra≥97	 <b>StrongColour</b> highlight one color

### Marks

 Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
 Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
 Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
 European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
 Luminaires are certified according to the European ENEC system

 Recommended mounting hole size

**IPxy** IP code indicating the degree of protection of live parts

**ERC** Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

<b>C</b> Clear cover	<b>L</b> Plain aluminium reflector
<b>D</b> Asymmetric reflector	<b>M</b> Matt parabolic louvre
<b>E</b> Polished parabolic louvre, high LOR	<b>S</b> SPOT - narrow angle
<b>F</b> FLOOD - wide angle	<b>U</b> MEDIUM - middle angle
<b>I</b> Microprismatic optical system	<b>W</b> Wide beam angle
<b>K</b> Opal diffuser	

### Electrical connection

<b>D</b> DALI dimmable	<b>P</b> Sensor and electronic ballast
<b>E</b> Electronic ballast non-dimmable	<b>T</b> By switch dimmable (touch dimm)
<b>M</b> Electronic ballast non-dimmable with 1h emergency	<b>TD</b> DALI or by switch (touch dimm) dimmable
<b>M3</b> Electronic ballast non-dimmable with 3h emergency	<b>U</b> Dimmable luminaire with dimmer on the luminaire

### Colour

<b>W</b>  White	<b>B</b>  Black	<b>S</b>  Silver
<b>1021</b>  RAL 1021	<b>3000</b>  RAL 3000	<b>6021</b>  RAL 6021
<b>7006</b>  RAL 7006	<b>7045</b>  RAL 7045	