



Family

Indi

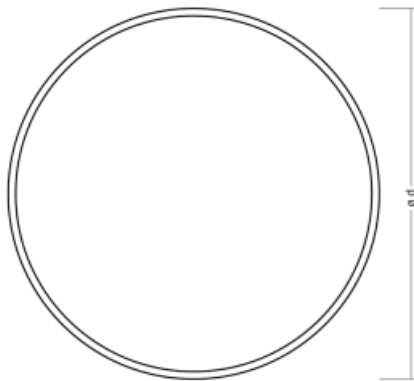


When Matúš Opálka closed himself into his study for a month, we were wondering what he would come up with. He designed lighting that gives off a gentle but luxurious effect. The Indi luminaire has received many awards for its appearance. Let's name the three most important ones – Red Dot Award, the iF Design Award and the German Design Award. If you are looking to light up meeting rooms, all kinds of corridors, halls, conference and banquet halls, the Indi is for you.

| | |
|------------------------------|---|
| Type of installation | Suspended |
| Light distribution | Direct-indirect |
| Colour of the luminaires | Black, Silver, White |
| Colour Temperature | 3000 K warm white, 4000 K cool white |
| Material | Aluminium |
| Light source | LED MODUL |
| Connection of the luminaires | ON/OFF DALI Other type of dimming |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 60 months |

Luminaire family variants Indi



Indi

Assembly

Light distribution


Energy class

A++, A+, A

Marks


| Code | Dimensions l/w/h (mm) | Power of the luminaire (W) | Luminous flux (lm) | Colour Temperature (K) | UGR |
|-----------------------|--------------------------|-------------------------------|-----------------------|------------------------------|--------|
| 108-501K-31FOD/840, W | ø 1000 × 106 | 110.4 | 9100 | 4000 | < 18.6 |
| 108-511K-47FSD/840, W | ø 1500 × 106 | 173.7 | 13710 | 4000 | < 17.6 |
| 108-521K-63FVD/840, W | ø 2010 × 106 | 215.1 | 18260 | 4000 | < 16.8 |
| 108-531K-77FZD/840, W | ø 2466 × 106 | 276 | 22420 | 4000 | < 16.3 |
| 108-541K-95FZD/840, W | ø 3012 × 106 | 315.7 | 27380 | 4000 | < 26.7 |
| 108-551K-B2FZD/840, W | ø 3558 × 106 | 367 | 32340 | 4000 | < 26.7 |
| 108-561K-C6FZD/840, W | ø 4000 × 106 | 417.3 | 36360 | 4000 | < 26.7 |







AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

| | | |
|-------|------------------------------|---|
| Notes | Colour of the luminaires |  |
| | Colour Temperature | 3000 K warm white 4000 K cool white |
| | Optic system | Opal diffuser |
| | Connection of the luminaires | ON/OFF DALI Other type of dimming |
| | Ra | 80 |




Luminaires come complete with all necessary accessories. For assembling luminaires with diameters of 2000 mm or more, you must purchase a tightening strap to install the luminaires.

Legend





Type of installation

| | |
|--|--|
|  Recessed lights |  Wall mounted lights |
|  Semi-recessed luminaire |  Suspended lights |
|  Surface lights |  Free-standing lights |
|  3 circuit track lights |  Table lamp lights |






Light distribution

| |
|--|
|  Direct luminaire |
|  Direct-indirect luminaire |
|  Indirect luminaire |

Light source

| | |
|---|--|
|  Tunable White adjusting the color temperature |  RealWhite true display of white color |
|  RealColour true display of colors Ra≥97 |  StrongColour highlight one color |

Marks

| |
|--|
|  Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable) |
|  Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable) |
|  Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation) |
|  European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it |
|  Luminaires are certified according to the European ENEC system |

 Recommended mounting hole size

IPxy IP code indicating the degree of protection of live parts

EARC Eurasian Conformity

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









Optic system

| | |
|--|------------------------------------|
| C Clear cover | L Plain aluminium reflector |
| D Asymmetric reflector | M Matt parabolic louvre |
| E Polished parabolic louvre, high LOR | S SPOT - narrow angle |
| F FLOOD - wide angle | U MEDIUM - middle angle |
| I Microprismatic optical system | W Wide beam angle |
| K Opal diffuser | |

Electrical connection

| | |
|---|--|
| D DALI dimmable | P Sensor and electronic ballast |
| E Electronic ballast non-dimmable | T By switch dimmable (touch dimm) |
| M Electronic ballast non-dimmable with 1h emergency | TD DALI or by switch (touch dimm) dimmable |
| M3 Electronic ballast non-dimmable with 3h emergency | U Dimmable luminaire with dimmer on the luminaire |

Colour

| | | |
|--|--|--|
| W  White | B  Black | S  Silver |
| 1021  RAL 1021 | 3000  RAL 3000 | 6021  RAL 6021 |
| 7006  RAL 7006 | 7045  RAL 7045 | |