

## Family


# Ineli

Ineli is a pendant luminaire with two luminous fluxes and a height of only 27 mm, which is best used in an office. The Ineli luminaire with direct-indirect distribution of light will attract you with its low aluminium profile which forms the frame of the lighting area. Thanks to its superior technical features, it can also make every meeting room, informal café or relaxation zone more pleasant. Power supplied via the suspension wires without the presence of a power cable provides a clean and fine detail, which makes this minimalist design of Ineli luminaire fit easily into all types of interiors. The luminaire can be hung straight or at any angle, which gives the space an impression of uniqueness and airiness. In addition, it can be perfectly combined with the free-standing version, i.e. the Sineli luminaire.

Type of installation	Suspended
Light distribution	Direct-indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white, 2700 K - 6500 K Tunable White
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	3
Connection of the luminaires	ON/OFF DALI Tunable white
Lifetime	L80/B20 50 000 hours
Warranty	60 months

## Luminaire family variants Ineli

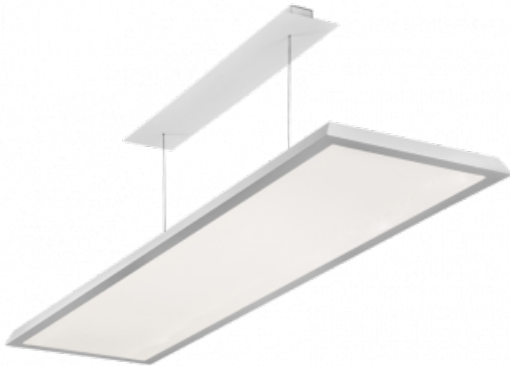

**Ineli**

**Assembly**

**Light distribution**


**Energy class**

A++, A+, A


**Marks**


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
235-571I-20GGE/840, W	1194 × 294 × 27	47.2	7000	4000	-
235-571I-20GHE/840, W	1194 × 294 × 27	66.7	9500	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI Tunable white
	Ra	80 90

Luminaires come complete with all necessary accessories.

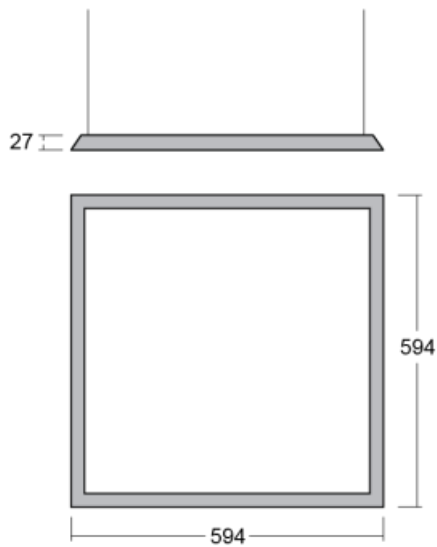**Ineli**

**Assembly**

**Light distribution**


**Energy class**

A++, A+, A

**Marks**


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
235-501I-10GGE/840, W	594 × 594 × 27	47.2	7000	4000	-
235-501I-10GHE/840, W	594 × 594 × 27	66.7	9500	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.









Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
	Optic system	Microprisma
	Connection of the luminaires	ON/OFF DALI Tunable white
	Ra	80 90

Luminaires come complete with all necessary accessories.






## Legend

### Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights






### Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

### Light source

	<b>Tunable White</b> adjusting the color temperature		<b>RealWhite</b> true display of white color
	<b>RealColour</b> true display of colors Ra≥97		<b>StrongColour</b> highlight one color

### Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system

 Recommended mounting hole size

**IP xy** IP code indicating the degree of protection of live parts

**ERC** Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

<b>C</b>	Clear cover	<b>L</b>	Plain aluminium reflector
<b>D</b>	Asymmetric reflector	<b>M</b>	Matt parabolic louvre
<b>E</b>	Polished parabolic louvre, high LOR	<b>S</b>	SPOT - narrow angle
<b>F</b>	FLOOD - wide angle	<b>U</b>	MEDIUM - middle angle
<b>I</b>	Microprismatic optical system	<b>W</b>	Wide beam angle
<b>K</b>	Opal diffuser		

### Electrical connection

<b>D</b>	DALI dimmable	<b>P</b>	Sensor and electronic ballast
<b>E</b>	Electronic ballast non-dimmable	<b>T</b>	By switch dimmable (touch dimm)
<b>M</b>	Electronic ballast non-dimmable with 1h emergency	<b>TD</b>	DALI or by switch (touch dimm) dimmable
<b>M3</b>	Electronic ballast non-dimmable with 3h emergency	<b>U</b>	Dimmable luminaire with dimmer on the luminaire

### Colour

<b>W</b>	 White	<b>B</b>	 Black	<b>S</b>	 Silver
<b>1021</b>	 RAL 1021	<b>3000</b>	 RAL 3000	<b>6021</b>	 RAL 6021
<b>7006</b>	 RAL 7006	<b>7045</b>	 RAL 7045		