



Type of installation	Suspended
Light distribution	Direct-indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	2
Connection of the luminaires	ON/OFF DALI DALI + sensor
Lifetime	L80/B20 50 000 hours
Warranty	60 months

Family

Lina80-S


Lina80-S luminaires are available in both ceiling mounted and suspended versions, including the illuminated corner segments.

Lina80-S system luminaire can be used to create different shapes or long lines, with special joints that prevent any light to shine through, creating thus a seamless visual effect, suitable for small offices as well as big halls.

Luminaire family variants Lina80-S



Lina80-S

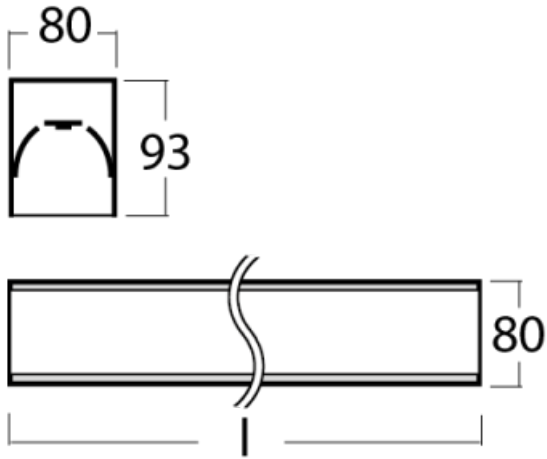

Assembly



Light distribution



Energy class


A++, A+, A

Marks




Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
08-501K-10GEE/840, W	561 × 93 × 80	15.5	1910	4000	< 22.1
08-501K-10GGE/840, W	561 × 93 × 80	22.7	2680	4000	< 23.3
08-501K-10GHE/840, W	561 × 93 × 80	32.4	3610	4000	< 24.3
08-501K-15GEE/840, W	842 × 93 × 80	25.8	3190	4000	< 21.7
08-501K-15GGE/840, W	842 × 93 × 80	37.8	4460	4000	< 22.8
08-501K-15GHE/840, W	842 × 93 × 80	54.1	6010	4000	< 23.9
08-501K-20GEE/840, W	1122 × 93 × 80	36.1	4470	4000	< 21.3
08-501K-20GGE/840, W	1122 × 93 × 80	52.9	6250	4000	< 22.4
08-501K-20GHE/840, W	1122 × 93 × 80	75.7	8420	4000	< 23.5
08-501K-25GEE/840, W	1403 × 93 × 80	46.5	5750	4000	< 21.4
08-501K-25GGE/840, W	1403 × 93 × 80	68	8030	4000	< 22.5
08-501K-25GHE/840, W	1403 × 93 × 80	97.3	10820	4000	< 23.5
08-501K-30GEE/840, W	1683 × 93 × 80	56.8	7030	4000	< 21.3
08-501K-30GGE/840, W	1683 × 93 × 80	83.1	9820	4000	< 22.4
08-501K-30GHE/840, W	1683 × 93 × 80	119	13230	4000	< 23.5
08-501K-35GEE/840, W	1964 × 93 × 80	67.1	8300	4000	< 21.2
08-501K-35GGE/840, W	1964 × 93 × 80	98.2	11600	4000	< 22.4
08-501K-35GHE/840, W	1964 × 93 × 80	140.6	15639	4000	< 23.4
08-501K-40GEE/840, W	2244 × 93 × 80	77.4	9580	4000	< 21.2
08-501K-40GGE/840, W	2244 × 93 × 80	113.3	13390	4000	< 22.3
08-501K-40GHE/840, W	2244 × 93 × 80	162.2	18040	4000	< 23.4

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma Opal diffuser
	Connection of the luminaires	ON/OFF DALI DALI + sensor
	Ra	80

End caps, cups, supply cable, and wire suspension for luminaires must be ordered separately. For connection into systems, please order the respective number of couplers, disassembly sets, or a supplementary cable for emergency systems.

Lina80-S

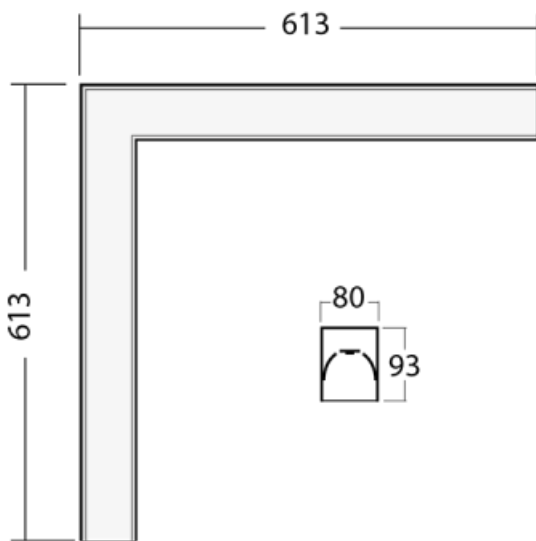

Assembly



Energy class

A++, A+, A

Light distribution




Marks



Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
08-521K-20GEE/840, W	613 × 93 × 613	36.1	4470	4000	< 21.3
08-521K-20GGE/840, W	613 × 93 × 613	52.9	6250	4000	< 22.4
08-521K-20GHE/840, W	613 × 93 × 613	75.7	8420	4000	< 23.5

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes

Colour of the luminaires 

Colour Temperature 3000 K warm white
4000 K cool white

Optic system Microprisma
Opal diffuser


Connection of the luminaires ON/OFF
DALI

Ra 80

End caps, cups, supply cable, and wire suspension for luminaires must be ordered separately. For connection into systems, please order the respective number of couplers, disassembly sets, or a supplementary cable for emergency systems.

Accessories


Code	Description
00-00352, K	cable 3x0,75 2000mm
00-00353, K	cable 4x0,75 2000mm
00-00355, K	cable 5x0,75 2000mm
00-00354, K	cable 5x0,75 1000mm
00-00358, K	cable 3x0,75 4000mm
00-00359, K	cable 4x0,75 4000mm
00-00360, K	cable 3x0,75 6000mm
00-00361, K	cable 4x0,75 6000mm
00-00350, K	cable 3x0,75 1000mm
00-00351, K	cable 4x0,75 1000mm



Code	Description
00-00370, W	ceiling cup 80x80x32mm

Notes

 Accessories colour


Code	Description
00-00300, N	wire suspension 2000mm
00-00301, N	wire suspension 4000mm
00-00302, N	wire suspension 6000mm



Code	Description
00-51300, W	set for suspension into 3-phase track, non-dimmable luminaires

Notes

 Accessories colour



Code	Description
00-51301, W	set for suspension into 3-phase track, dimmable luminaires

Notes Accessories colour



Code	Description
00-00200, N	straight connector



Code	Description
00-01200, F	Accessory for gear-tray release



Code	Description
00-20100, W	2xend cap - metal, 3-conductor terminal box, grommet

Notes Accessories colour



Code	Description
00-20101, W	2xend cap - metal, 5-conductor terminal box, grommet

Notes Accessories colour

**Code****Description**

00-20700, W

2 pcs of wall fastening Lipo/Lina




Notes**Accessories colour**

Legend





Type of installation

 Recessed lights	 Wall mounted lights
 Semi-recessed luminaire	 Suspended lights
 Surface lights	 Free-standing lights
 3 circuit track lights	 Table lamp lights






Light distribution

 Direct luminaire
 Direct-indirect luminaire
 Indirect luminaire

Light source

 Tunable White adjusting the color temperature	 RealWhite true display of white color
 RealColour true display of colors Ra≥97	 StrongColour highlight one color

Marks

 Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
 Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
 Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
 European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
 Luminaires are certified according to the European ENEC system

 Recommended mounting hole size

IPxy IP code indicating the degree of protection of live parts

ERC Eurasian Conformity

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









Optic system

C Clear cover	L Plain aluminium reflector
D Asymmetric reflector	M Matt parabolic louvre
E Polished parabolic louvre, high LOR	S SPOT - narrow angle
F FLOOD - wide angle	U MEDIUM - middle angle
I Microprismatic optical system	W Wide beam angle
K Opal diffuser	

Electrical connection

D DALI dimmable	P Sensor and electronic ballast
E Electronic ballast non-dimmable	T By switch dimmable (touch dimm)
M Electronic ballast non-dimmable with 1h emergency	TD DALI or by switch (touch dimm) dimmable
M3 Electronic ballast non-dimmable with 3h emergency	U Dimmable luminaire with dimmer on the luminaire

Colour

W  White	B  Black	S  Silver
1021  RAL 1021	3000  RAL 3000	6021  RAL 6021
7006  RAL 7006	7045  RAL 7045	