



Type of installation	Recessed
Light distribution	Direct
Colour of the luminaires	White
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency Other type of dimming ON/OFF + 3h emergency
Lifetime	L80/B20, L70/B50 50 000 hours
Warranty	60 months

## Family



# Puri

We were contemplating about how to achieve total design clarity, and so the family of Puri built-in circular luminaires was built. Choose between the framed and frameless version. Mount it directly into the ceiling without cables or suspending. You can create combinations that best suit the needs of commercial spaces, offices, hotels or corridors using the six luminaire diameters on the ceiling. Puri luminaires merge with interiors and also playfully combine with other round luminaire families.

## Luminaire family variants Puri



Puri

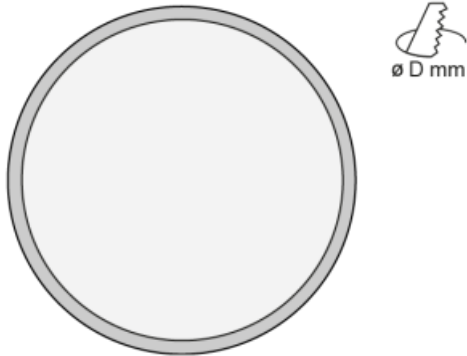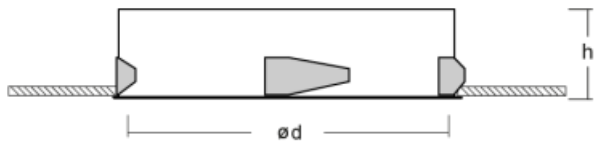

Assembly



Light distribution



Energy class

A++, A+, A

Marks



Notes

Colour of the luminaires



Colour Temperature 3000 K warm white  
4000 K cool white



Optic system Microprisma  
Opal diffuser

Connection of the luminaires ON/OFF  
DALI  
Other type of dimming

Ra 80

Luminaires come complete with all necessary accessories.

Puri



Assembly



Light distribution



Energy class

A++, A+, A

Marks





Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
140-043K-10GEE/840	∅ 125 × 236	11	970	4000	-
140-052K-10GHE/840	∅ 125 × 355	17.1	1540	4000	< 20.2
140-052K-10GIE/840	∅ 125 × 435	32.8	3000	4000	< 20.6
140-062K-10GNE/840	∅ 125 × 633	71.6	7100	4000	< 20.9
140-072K-12GEE/840	∅ 125 × 924	125.6	11800	4000	< 20
140-082K-22GEE/840	∅ 125 × 1203	245	24290	4000	< 20.2

These codes represent luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma Opal diffuser
Connection of the luminaires		ON/OFF
		DALI
		ON/OFF + 1h emergency
		ON/OFF + 3h emergency
Ra		80

Luminaires come complete with all necessary accessories.

## Puri

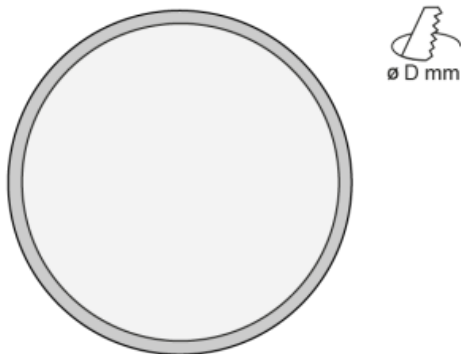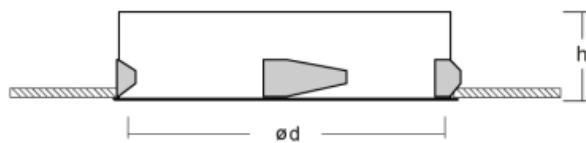

### Assembly



### Light distribution



### Energy class


A++, A+, A

### Marks





Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
14X-0XXX-10GXX/840, W	∅ 0 × 0	10.1	920	4000	-

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	4000 K cool white
	Ra	0
Luminaires come complete with all necessary accessories.		

## Puri



### Assembly



### Light distribution



### Energy class

A++, A+, A

### Marks











Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
140-0XXX-10GXX/830	∅ 0 × 0	16.7	900	4000	-

These codes represent luminaires with chromaticity temperature 4000K and opal diffuser.




Notes	Colour Temperature	4000 K cool white
	Ra	0
Luminaires come complete with all necessary accessories.		

## Legend

### Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights








### Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

### Light source

	<b>Tunable White</b> adjusting the color temperature		<b>RealWhite</b> true display of white color
	<b>RealColour</b> true display of colors Ra≥97		<b>StrongColour</b> highlight one color

### Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

### 09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









### Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

### Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

### Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		