



Family


Ture

The Ture family of lighting has an excellent index of UGR <19 up to 3000 lm, so it does not blind. You can use the luminaire for offices, meeting rooms and showrooms or employ special sources with it. RealWhite highlights white, Strong Color highlights the selected color, and Real Color accentuates its own color. With Tunable White, you can set the temperature of the white color according to daylight. You can make the illuminated objects look even more appealing using these sources.

Type of installation	Recessed
Light distribution	Direct
Colour of the luminaires	White
Colour Temperature	3000 K warm white, 4000 K cool white, 2700 K - 6500 K Tunable White
Material	Aluminium
Light source	LED MODUL
LED type	Tunable White
MacAdam Light source	3
Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency Tunable white
Lifetime	L80/B10 50 000 hours
Warranty	60 months

Luminaire family variants Ture

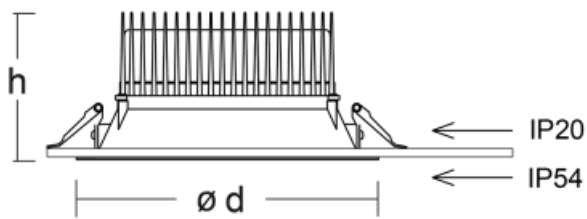

Ture

Assembly

Energy class

A++, A+, A

Light distribution

Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
56-001L-10GDE/840, W	ø 185 × 100	9.3	1240	4000	< 15.2
56-001L-10GGE/840, W	ø 185 × 100	14.2	1890	4000	< 16.6
56-001L-10GHE/840, W	ø 185 × 100	24.4	2770	4000	< 17.9
57-001L-10GDE/840, W	ø 226 × 110	9.3	1250	4000	< 15.5
57-001L-10GGE/840, W	ø 226 × 110	14.2	1940	4000	< 17
57-001L-10GHE/840, W	ø 226 × 110	24.4	2780	4000	< 18.3

The indicated codes stand for a white luminaire with colour temperature of 4000K.

Notes

Colour of the luminaires	●
Colour Temperature	3000 K warm white 4000 K cool white 2700 K - 6500 K Tunable White
Optic system	Plain aluminium reflector
Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency Tunable white
Ra	80 90

Luminaires come complete with all necessary accessories.

Legend

Type of installation

Recessed lights	Wall mounted lights
Semi-recessed luminaire	Suspended lights
Surface lights	Free-standing lights
3 circuit track lights	Table lamp lights

Light distribution

Direct luminaire
Direct-indirect luminaire
Indirect luminaire

Light source

Tunable White adjusting the color temperature	RealWhite true display of white color
RealColour true display of colors Ra≥97	StrongColour highlight one color

Marks

Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
Luminaires are certified according to the European ENEC system

Recommended mounting hole size

IPxy IP code indicating the degree of protection of live parts

ERC Eurasian Conformity

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

C Clear cover	L Plain aluminium reflector
D Asymmetric reflector	M Matt parabolic louvre
E Polished parabolic louvre, high LOR	S SPOT - narrow angle
F FLOOD - wide angle	U MEDIUM - middle angle
I Microprismatic optical system	W Wide beam angle
K Opal diffuser	

Electrical connection

D DALI dimmable	P Sensor and electronic ballast
E Electronic ballast non-dimmable	T By switch dimmable (touch dimm)
M Electronic ballast non-dimmable with 1h emergency	TD DALI or by switch (touch dimm) dimmable
M3 Electronic ballast non-dimmable with 3h emergency	U Dimmable luminaire with dimmer on the luminaire

Colour

W White	B Black	S Silver
1021 RAL 1021	3000 RAL 3000	6021 RAL 6021
7006 RAL 7006	7045 RAL 7045	