



Luminaire


Stan

245-861I-10GGE/840, B



The Stan luminaire with direct and direct-indirect distribution of light has been designed for comfortable and efficient work. It excels not only in its technical parameters, but also the narrow profile of the head itself, thanks to which the luminaire looks decent, professional and can easily blend in with the surroundings. The luminaire is fitted with an optical element consisting of a combination of optical lenses and a plastic parabolic louver, thanks to which the optical materials are not visible and therefore the luminaire does not dazzle. The louver comes in both the basic matt black and matt white colours. The luminaires of the Stan family are designed for both table mounting and free standing, so you can move them freely at any time, thus adapting the arrangement of the items in the room according to your needs.

Technical drawing

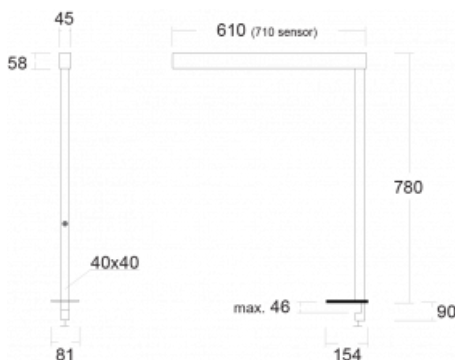

Type of installation	Table lamp
Light distribution	Direct-indirect
Luminaire shape	Angular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	60 months
Description of luminaires	Luminaire table lamp
item description	table lamp luminaire; flexible cord EURO + switch
Dimensions	610 mm × 47 mm × 780 mm
Light source	LED MODUL
Type of optical system	Microprisma
Luminous flux	2780 lm ± 10 %
Colour Temperature	4000 K cool white
Luminous efficacy	90 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	18.5

Luminaire power input	31 W ± 10 %
Connection of the luminaires	Electronic ballast non-dimmable
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

Downloads

[Installation instructions](#)[Photos](#)