



Family

Lipo60-S



You will appreciate the L-Click system on the Lipo60-S, which effectively saves you both time and money. How? The module simply clicks into the profile, so a lot of work is saved during assembly. This solution also prevents the direct touch of the LED technology and lengthens its operating life. The Lipo60-S lighting system can be assembled creating endless lines and a big variety of shapes. In addition to great power output, the luminaire also has a great price. It will find its use in commercial, social and public spaces.

Type of installation	Recessed, Surface, Wall mounted, Suspended, 3 circuit track
Light distribution	Direct
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	2
Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency Other type of dimming ON/OFF + 3h emergency
Lifetime	L90/B50 50 000 hours
Warranty	60 months

Luminaire family variants Lipo60-S



Lipo60-S

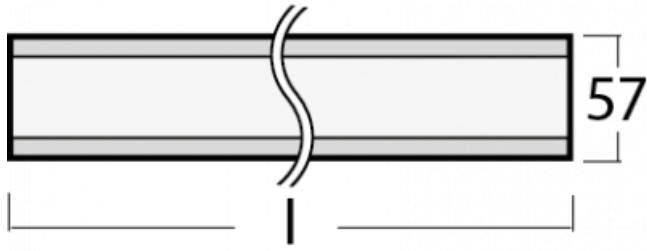

Assembly



Light distribution



Energy class


A++, A+, A

Marks




Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
04S-200K-10GEE/840, W	561 × 57 × 67	7.4	1060	4000	< 25
04S-200K-10GGE/840, W	561 × 57 × 67	12.4	1630	4000	< 26.5
04S-200K-15GEE/840, W	842 × 57 × 67	11.1	1600	4000	< 25.1
04S-200K-15GGE/840, W	842 × 57 × 67	18.6	2450	4000	< 26.5
04S-200K-20GEE/840, W	1122 × 57 × 67	16.6	2130	4000	< 25.1
04S-200K-20GGE/840, W	1122 × 57 × 67	24.8	3270	4000	< 26.6
04S-200K-25GEE/840, W	1403 × 57 × 67	18.5	2670	4000	< 24.4
04S-200K-25GGE/840, W	1403 × 57 × 67	31	4090	4000	< 26.6
04S-200K-30GEE/840, W	1683 × 57 × 67	22.2	3200	4000	< 25.1
04S-200K-30GGE/840, W	1683 × 57 × 67	37.2	4910	4000	< 26.6
04S-200K-35GEE/840, W	1964 × 57 × 67	25.9	3740	4000	< 25.1
04S-200K-35GGE/840, W	1964 × 57 × 67	43.4	5720	4000	< 26.5
04S-200K-40GEE/840, W	2244 × 57 × 67	29.6	4270	4000	< 25.1
04S-200K-40GGE/840, W	2244 × 57 × 67	49.6	6540	4000	< 26.6
04S-200K-50GEE/840, W	2805 × 57 × 67	37	5340	4000	< 25.1
04S-200K-50GGE/840, W	2805 × 57 × 67	62	8180	4000	< 26.6
04S-200K-60GEE/840, W	3366 × 57 × 67	44.4	6410	4000	< 25.1
04S-200K-60GGE/840, W	3366 × 57 × 67	74.4	9820	4000	< 26.6
04S-200K-80GEE/840, W	4488 × 57 × 67	59.2	8850	4000	< 25.2
04S-200K-80GGE/840, W	4488 × 57 × 67	99.2	13090	4000	< 26.6

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma Opal diffuser
	Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency Other type of dimming ON/OFF + 3h emergency
	Ra	80

End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

Lipo60-S

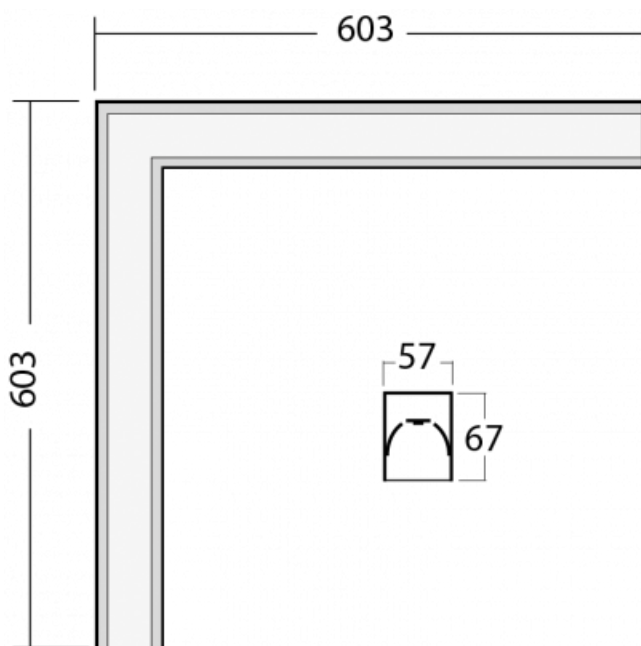

Assembly



Light distribution



Energy class

A++, A+, A

Marks




Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
04S-220K-20GEE/840, W	603 × 603 × 67	16.6	2130	4000	< 24.8
04S-220K-20GGE/840, W	603 × 603 × 67	24.8	3270	4000	< 26.3



AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	● ● ●
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma Opal diffuser
	Connection of the luminaires	ON/OFF DALI Other type of dimming
	Ra	80

End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

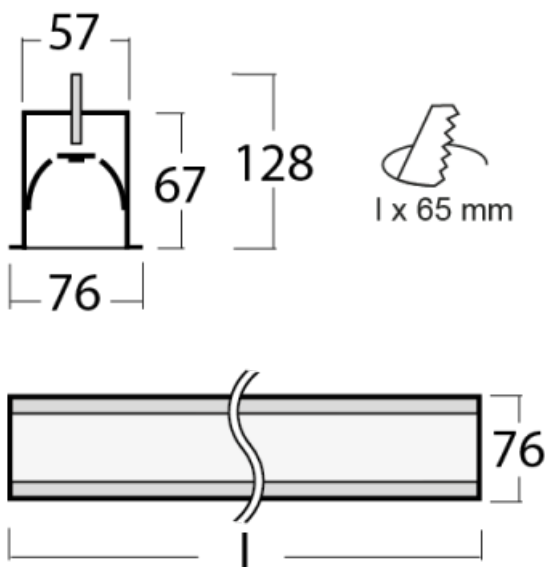Lipo60-S



Assembly	Light distribution
	
Energy class	Marks
A++, A+, A	CE


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
04S-000K-10GEE/840, W	561 × 76 × 67	7.4	1060	4000	< 25
04S-000K-10GGE/840, W	561 × 76 × 67	12.4	1630	4000	< 26.5
04S-000K-15GEE/840, W	842 × 76 × 67	11.1	1600	4000	< 25.1
04S-000K-15GGE/840, W	842 × 76 × 67	18.6	2450	4000	< 26.5
04S-000K-20GEE/840, W	1122 × 76 × 67	16.6	2130	4000	< 25.1
04S-000K-20GGE/840, W	1122 × 76 × 67	24.8	3270	4000	< 26.6
04S-000K-25GEE/840, W	1403 × 76 × 67	18.5	2670	4000	< 24.4
04S-000K-25GGE/840, W	1403 × 76 × 67	31	4090	4000	< 26.6
04S-000K-30GEE/840, W	1683 × 76 × 67	22.2	3200	4000	< 25.1
04S-000K-30GGE/840, W	1683 × 76 × 67	37.2	4910	4000	< 26.6
04S-000K-35GEE/840, W	1964 × 76 × 67	25.9	3740	4000	< 25.1
04S-000K-35GGE/840, W	1964 × 76 × 67	43.4	5720	4000	< 26.5
04S-000K-40GEE/840, W	2244 × 76 × 67	29.6	4270	4000	< 25.1
04S-000K-40GGE/840, W	2244 × 76 × 67	49.6	6540	4000	< 26.6
04S-000K-50GEE/840, W	2805 × 76 × 67	37	5340	4000	< 25.1
04S-000K-50GGE/840, W	2805 × 76 × 67	62	8180	4000	< 26.6
04S-000K-60GEE/840, W	3366 × 76 × 67	44.4	6410	4000	< 25.1
04S-000K-60GGE/840, W	3366 × 76 × 67	74.4	9820	4000	< 26.6
04S-000K-80GEE/840, W	4488 × 76 × 67	59.2	8850	4000	< 25.2
04S-000K-80GGE/840, W	4488 × 76 × 67	99.2	13090	4000	< 26.6



AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	● ● ●
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Microprisma Opal diffuser
	Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency Other type of dimming ON/OFF + 3h emergency
	Ra	80

The appropriate quantity of terminals must be ordered for the luminaires. Order the appropriate quantity of connectors for connecting in the series.

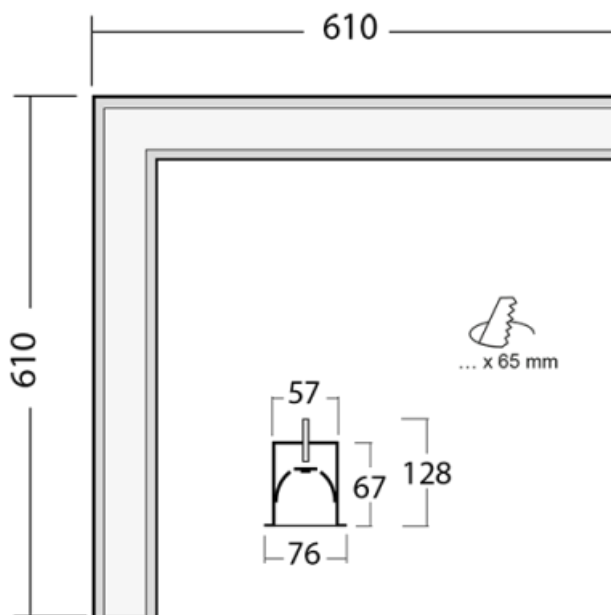Lipo60-S




Assembly	Light distribution
	
Energy class	Marks
A++, A+, A	CE

Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
04S-020K-20GEE/840, W	610 × 610 × 67	16.6	2130	4000	< 24.8
04S-020K-20GGE/840, W	610 × 610 × 67	24.8	3270	4000	< 26.3

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes

Colour of the luminaires 

Colour Temperature 3000 K warm white
4000 K cool white

Optic system Microprisma
Opal diffuser

Connection of the luminaires ON/OFF
DALI
Other type of dimming

Ra 80

The appropriate quantity of terminals must be ordered for the luminaires. Order the appropriate quantity of connectors for connecting in the series.

Accessories


Code	Description
00-00300, N	wire suspension 2000mm
00-00301, N	wire suspension 4000mm
00-00302, N	wire suspension 6000mm



Code	Description
00-00350, K	cable 3x0,75 1000mm
00-00351, K	cable 4x0,75 1000mm
00-00352, K	cable 3x0,75 2000mm
00-00353, K	cable 4x0,75 2000mm
00-00354, K	cable 5x0,75 1000mm
00-00355, K	cable 5x0,75 2000mm
00-00356, K	cable 5x0,75 4000mm
00-00357, K	cable 5x0,75 6000mm
00-00358, K	cable 3x0,75 4000mm
00-00359, K	cable 4x0,75 4000mm
00-00360, K	cable 3x0,75 6000mm
00-00361, K	cable 4x0,75 6000mm



Code	Description
00-00370, W	ceiling cup 80x80x32mm

Notes

Accessories colour



Code	Description
00-00500	wire for emergency lighting XX-XXXX-20
00-00501	wire for emergency lighting XX-XXXX-40



Code	Description
00-00600, F	ceiling fastening for luminaires 132-5xxK, 04-2000x, 05-2000x, 09-200x - 1 piece



Code	Description
00-20700, W	2 pcs of wall fastening Lipo/Lina

Notes Accessories colour



Code	Description
04-00100, W	2xend cap - metal, 3-conductor terminal box, grommet

Notes Accessories colour



Code	Description
04-00101, W	2xend cap - metal, 5-conductor terminal box, grommet


Notes Accessories colour



Code	Description
04-00200, N	straight connector



Code	Description
04-01200, F	Accessory for gear-tray release



Code	Description
04-20100, W	2xend cap - metal, 3-conductor terminal box, grommet

Notes Accessories colour



Code	Description
04-20101, W	2xend cap - metal, 5-conductor terminal box, grommet

Notes Accessories colour



Code	Description
04-20102, W	2xend cap - plastic, 3-conductor terminal box, grommet

Notes Accessories colour



Code	Description
04-20103, W	2xend cap - plastic, 5-conductor terminal box, grommet

Notes Accessories colour









**Code****Description**

04-20900, F




bracket for installation of suspended type of profile as recessed trimless

Legend

Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights









Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

Light source

	Tunable White adjusting the color temperature		RealWhite true display of white color
	RealColour true display of colors Ra≥97		StrongColour highlight one color

Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size
	IP code indicating the degree of protection of live parts
	Eurasian Conformity

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

09-501I-20GGE/840, W

Optic system

Electrical connection

Colour









Optic system

C	Clear cover	L	Plain aluminium reflector
D	Asymmetric reflector	M	Matt parabolic louvre
E	Polished parabolic louvre, high LOR	S	SPOT - narrow angle
F	FLOOD - wide angle	U	MEDIUM - middle angle
I	Microprismatic optical system	W	Wide beam angle
K	Opal diffuser		

Electrical connection

D	DALI dimmable	P	Sensor and electronic ballast
E	Electronic ballast non-dimmable	T	By switch dimmable (touch dimm)
M	Electronic ballast non-dimmable with 1h emergency	TD	DALI or by switch (touch dimm) dimmable
M3	Electronic ballast non-dimmable with 3h emergency	U	Dimmable luminaire with dimmer on the luminaire

Colour

W	 White	B	 Black	S	 Silver
1021	 RAL 1021	3000	 RAL 3000	6021	 RAL 6021
7006	 RAL 7006	7045	 RAL 7045		